


TapeMate™ LED Tape Light & Wire Tri-Way Connector



The compact, capable, safe, and versatile TapeMate Tri-Way Connector LED tape light and wire connector provides secure connections between LED tape light sections, between tape light and wire, or between pairs of wire leads. TapeMate fits easily into many aluminum channels with diffusers. Pre-installed 3M VHB tape provides an excellent strain relief.

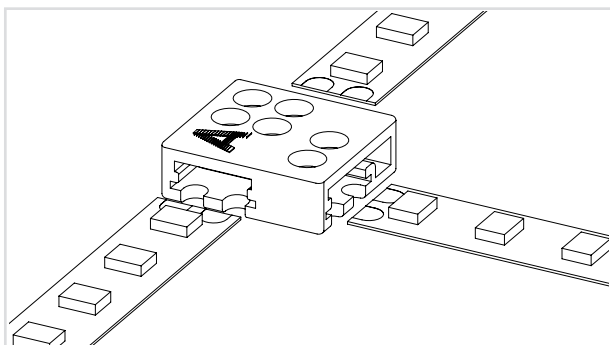


TECHNICAL INFORMATION


Voltage	12-24V DC
Max. Current	8A*
Mounting	3M™ VHB tape (pre-installed)
Max. Wire Gauge	16 AWG
Compatible Wire	Solid core, tinned, stranded
Warranty	Lifetime

*For Class 2 compliance, circuits are limited to 5A (12V) and 4A (24V).


Note: Pre-installed 3M VHB tape adds approximately 0.04 in. in height. 3M VHB tapes can be removed if tape light does not fit into channel.



AL-01-01-9900-T
AL-01-02-9900-T
AL-01-08-9900-T
AL-01-51-9900-T



AL-01-07-9900-T
AL-01-15-9900-T
AL-01-16-9900-T
AL-01-19-9900-T

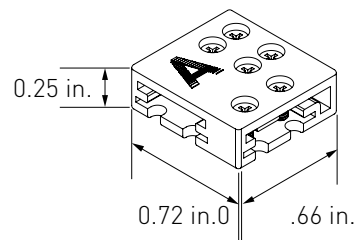

AL-01-05-9900-T
AL-01-04-9900-T
AL-01-79-9900-T
AL-01-80-9900-T
AL-01-81-9900-T
AL-01-82-9900-T

PRODUCT INFORMATION


Item Number	Compatible Tape Light	Dimensions (W x L x H)
AL-01-01-9900-T	PrimaLine 1.5	0.61 x 0.55 x 0.25 in.
AL-01-02-9900-T	PrimaLine 3	0.61 x 0.55 x 0.25 in.
AL-01-51-9900-T	PrimaLine 3 SE	0.61 x 0.55 x 0.25 in.
AL-01-04-9900-T	PrimaLine 1.5 XT	0.72 x 0.66 x 0.28 in.
AL-01-05-9900-T	PrimaLine 3 XT	0.72 x 0.66 x 0.28 in.
AL-01-07-9900-T	PrimaLine 5.5 LP	0.66 x 0.61 x 0.25in.
AL-01-08-9900-T	PrimaLine 2.7 LP	0.61 x 0.55 x 0.25 in.
AL-01-15-9900-T	PrimaLine 4.4 Gen 2	0.66 x 0.61 x 0.25in
AL-01-16-9900-T	PrimaLine 4.4 XT Gen 2	0.66 x 0.61 x 0.25in
AL-01-19-9900-T	PrimaLine 7	0.66 x 0.61 x 0.25in
AL-01-79-9900-T	Varien 1.2 XT	0.72 x 0.66 x 0.28 in.
AL-01-80-9900-T	Varien 2.7	0.72 x 0.66 x 0.28 in.
AL-01-81-9900-T	Varien 5.5	0.72 x 0.66 x 0.28 in.
AL-01-82-9900-T	Varien 8	0.72 x 0.66 x 0.28 in.

INSTRUCTIONS

NOTE: Check polarity of the tape light and/or wires: (+) and (-) symbols on the tape should match POSITIVE (red) and NEGATIVE (black) wires.

NOTE: Ensure all components are installed in accordance with the current National Electric Code (NEC), and UL safety standards.

Connecting Standard Tape Light

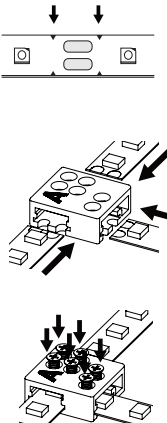

Cut at the arrow closest to the connector to leave the solder pads intact.


Remove the adhesive cover from the back of the tape light.

Insert the tape lights into the connector so that the solder pads are seated under the screws.

Using the included screwdriver, tighten the screws securely.

WARNING: DO NOT OVERTIGHTEN.
Overtightening can crack the connector.

Connecting Low-Profile Tape Lights

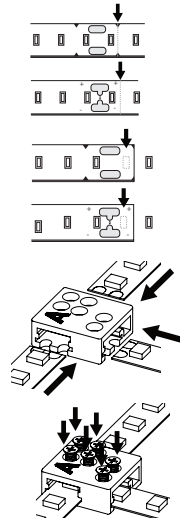

Cut at the arrow closest to the connector to leave the solder pads intact.

Using a pliers or a scraping tool, remove the diodes next to the solder pads.


Remove the adhesive cover from the back of the tape light.

Insert the tape light into the connector so that the solder pads are seated under the screws.

Using the included screwdriver, tighten the screws securely.

WARNING: DO NOT OVERTIGHTEN.
Overtightening can crack the connector.

Connecting Wire




If wire is solid core or tinned, insert the wires into the connector.


WARNING: DO NOT OVERTIGHTEN.
Overtightening can crack the connector.

CONFIGURATIONS

Tape to Hard-Wired Power Connection

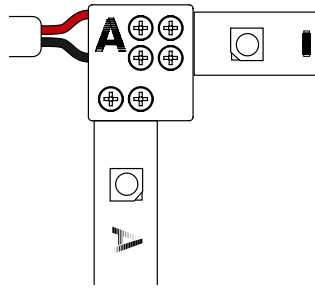


Tape-to-Tape Connection

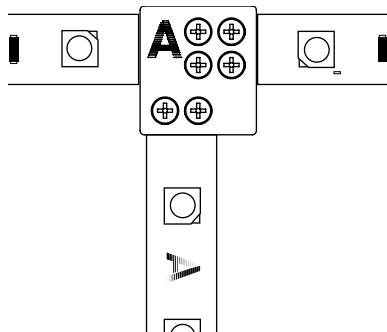


Flexible Jumper Connection


*Two TapeMates Required

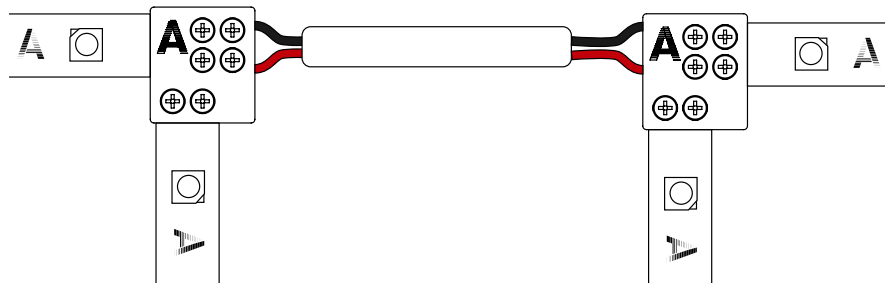

Tape to DC Plug Connection

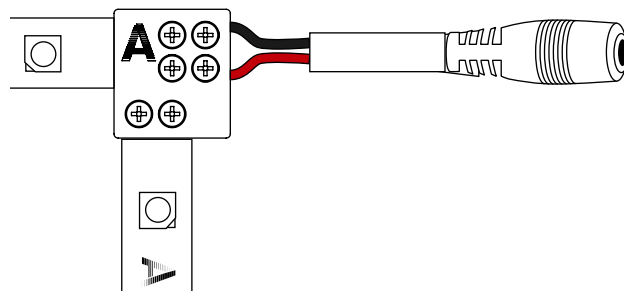

Wire to Wire Connection



TAPEMATE & CHANNEL COMPATIBILITY

	Polymer Low-Profile Surface Mount	Surfa 1	Surfa 2	Surfa 2X	Surfa 3	Surfa 6	Surfa 7	Surfa 8	SurfaFlex 1	Suspan® 1 Gen 2	Ankr® 1	Ankr® 2	Ankr® 3	Ankr® 4	Naro® 4	Duro 1	Duro 2	L-Shaped Channel Small	L-Shaped Channel Large
PrimaLine® 1.5	Y			Y		Y		Y		Y	Y	Y			Y				Y
PrimaLine 1.5 XT				Y				Y		Y	Y	Y							
PrimaLine 2.7 LP	Y			Y		Y		Y		Y	Y	Y			Y				Y
PrimaLine 3	Y			Y		Y		Y		Y	Y	Y			Y				Y
PrimaLine 3 SE	Y			Y		Y		Y		Y	Y	Y			Y				Y
PrimaLine 3 XT				Y				Y		Y	Y	Y							
PrimaLine 4.4 Gen 2	Y			Y		Y		Y		Y	Y	Y			Y				Y
PrimaLine 4.4 XT Gen 2	Y			Y		Y		Y		Y	Y	Y			Y				Y
PrimaLine 5.5 LP	Y			Y		Y		Y		Y	Y	Y			Y				Y
PrimaLine 7	Y			Y		Y		Y		Y	Y	Y			Y				Y
Varien 1.2 XT Dim-to-Warm				Y				Y		Y	Y	Y							
Varien 2.7 Dim-to-Warm				Y				Y		Y	Y	Y							
Varien 5.5 Dim-to-Warm				Y				Y		Y	Y	Y							
Varien 8 Dim-to-Warm				Y				Y		Y	Y	Y							

	Mudr 1		Mudr 2		Mudr ArcCove 3 in.		Mudr ArcCove 4 in.		Mudr AlCove 3 in.		Mudr AlCove 4 in.		Mudr Wall Wash 2 in.	Surfa KnifeEdge 4 in.		Surfa Cornice 4 in.	
	Back Lighting	Edge Lighting	Back Lighting	Edge Lighting	Back Lighting	Edge Lighting	Back Lighting	Edge Lighting	Back Lighting	Edge Lighting	Back Lighting	Edge Lighting	Back Lighting	Back Lighting	Edge Lighting	Back Lighting	Edge Lighting
PrimaLine® 1.5	Y		Y					Y						Y	Y	Y	
PrimaLine 1.5 XT	Y		Y												Y	Y	
PrimaLine 2.7 LP	Y		Y											Y	Y	Y	
PrimaLine 3	Y		Y					Y						Y	Y	Y	
PrimaLine 3 XT	Y		Y												Y	Y	
PrimaLine 4.4 Gen 2	Y		Y												Y	Y	
PrimaLine 4.4 XT Gen 2	Y		Y												Y	Y	
PrimaLine 5.5 LP	Y		Y														
PrimaLine 7	Y		Y												Y	Y	
Varien 1.2 XT Dim-to-Warm	Y		Y												Y	Y	
Varien 2.7 Dim-to-Warm																	
Varien 5.5 Dim-to-Warm	Y		Y												Y	Y	
Varien 8 Dim-to-Warm	Y		Y												Y	Y	