


## PIR Motion Sensor Switch

AL-97-99-9918

1. After securing compatible LED lights in place, strip the ends of the lead wires.
2. Match positive (+) and negative (-) lead wires to the polarity of the output screw terminals.
3. Loosen the output screw terminal connection with a screwdriver.
4. Insert wires into the output screw terminals and tighten screws to secure in place.
5. Strip the ends of the lead wires from the power source.
6. Match positive (+) and negative (-) lead wires to the polarity of the input screw terminals.
7. Loosen the input screw terminal connection with a screwdriver.
8. Insert wires into the input screw terminals and tighten screws to secure in place.
9. Connect power source to test motion sensor.

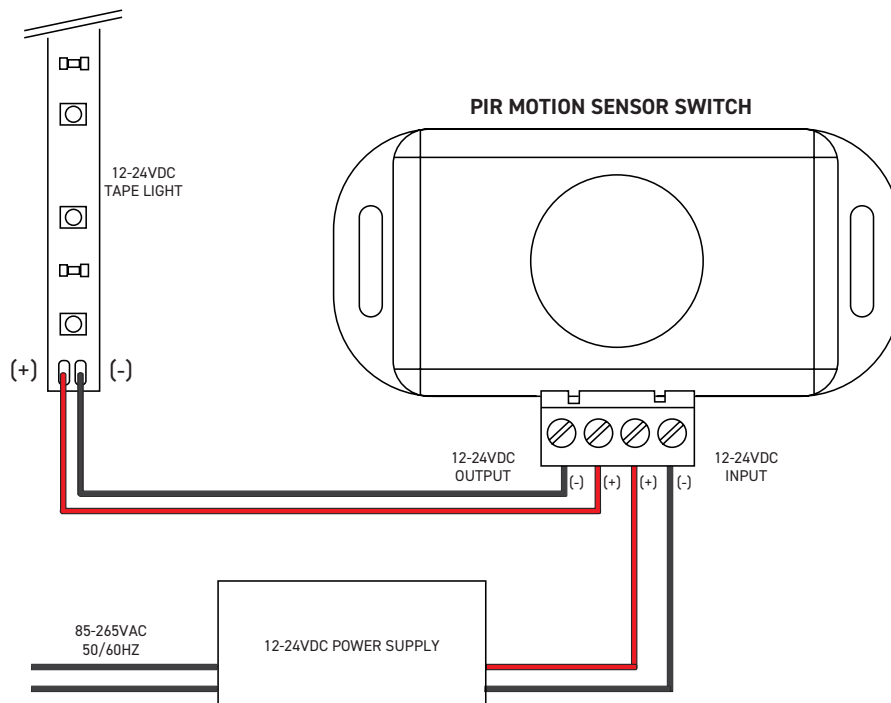

10. To adjust the time of delay, insert a screwdriver into the control dial located on the back of the device.
  - a. Turn the screwdriver clockwise to increase the length of time the lights will remain on (between 1-10 minutes).
  - b. Turn the screwdriver counterclockwise to decrease the length of time the lights will remain on (between 1-10 minutes).

