

ALLOYLED®

GRAZE WITH PRECISION

FocaLine 6

Flexible Wall Grazer



Focused Beam Angle

Offers a beam angle of only **10°** to effortlessly skim the surface of walls, accentuating its texture with **precision**.



4000+ Peak Center Beam Candela

Boasts a slim profile and low power consumption, yet delivers an impressive, high performance **4000+ peak center beam candela**.



Available in Wet Location

When ordered through our customization department, FocaLine 6 is rated for wet locations with **factory-sealed connections**.



Product Specifications



33 ft. Spool	Voltage	Color Temperature	Watts Per Foot	Lumens Per Foot	CRI	Maximum Run
AL-01-76-2461	24V DC	● 2700K	6W	422	95	33 ft.
AL-01-76-2462	24V DC	● 3000K	6W	415	96	33 ft.
AL-01-76-2468	24V DC	● 3500K	6W	445	95	33 ft.
AL-01-76-2463	24V DC	○ 4000K	6W	473	96	33 ft.

Accessories

Surface-Mount Channel Kit

1 channel, 1 diffuser cover, 2 end caps, 7 inner clips, 4 mounting clips with screws and 2 straight connectors with screws

AL-01-76-9924-KIT-BL (4 ft., Black)

Sleek, beautiful **channel** securely houses **Focaline 6** for easy installation.

Inner clips securely mount FocaLine 6 into the channel.



Create longer lengths by linking FocaLine 6 channels together with the **straight connectors** that slide into the tracks at the bottom of the channel.

Mounting clips are secured to the installation surface with provided screws. The channel securely clicks into the clip.




Directly Mount FocaLine 6

Metal Mounting Clips/Screws - Pack of 5 (Attach directly to FocaLine 6)

AL-01-76-9981-AL

Mounting clips attach directly to FocaLine 6 allowing you to mount the light without a channel. A great option for tight spaces, or when the light will be hidden, such as in a cove.

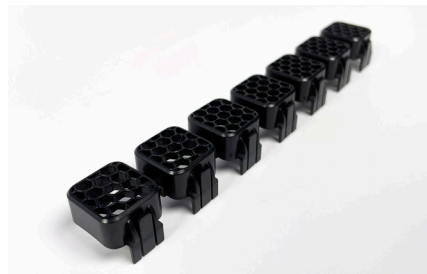

Anti-Glare Louvers

AL-01-76-9931-BL (6 in., Black)

The **anti-glare louvers** are designed to reduce glare and can be used with or without a channel. Recommended for when the light beam is visible, such as in a walkway shining light up a wall or a lower exposed wall at eye level.



Adjustable Bracket

AL-01-76-9986-AL

The **adjustable bracket** is designed to allow precise positioning of the channel at 0°, 30°, 60° or 90° and can be securely mounted to various surfaces.

Order Now!



Email: solutions@AlloyLED.com



Call: 800.910.LEDS (5337)



Fax: 510.338.6173