

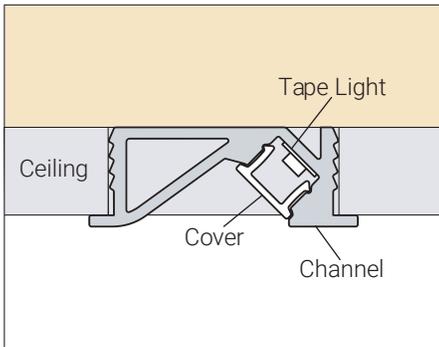
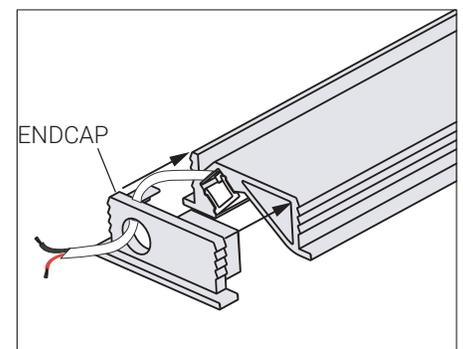


Naro Wall Wash Channel for Razorline Tape Lights

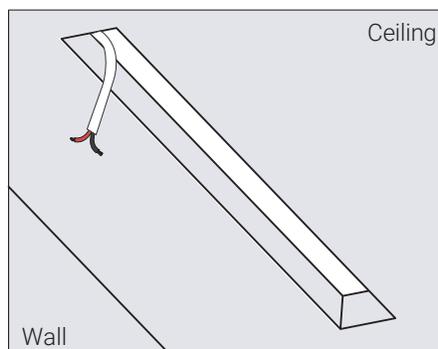

1. Before installing the tape light into the channel, test its connection to power. If using a full spool of tape, connect one end of the tape to DC power and turn power on. If using a cut section of tape, attach the connector to the tape, then connect it to DC power.
2. Position the 24V DC Class 2 power supply in a suitable location within 30 feet of the desired fixture location.




Note: Longer distances are acceptable when using a thicker 12 AWG wire.

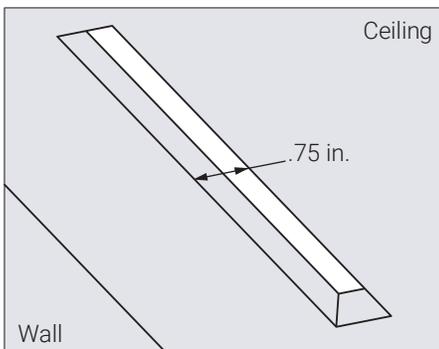

3. Cut a .75 in. opening where you would like to mount the fixture. The recommended distance is 12 in. - 18 in. from the wall to be washed.

4. Bring power through the drywall to a point that aligns with the fixture's cable conduit.

5. Assemble an end cap on each end of the fixture. Pass the lead cables through power feed hole.

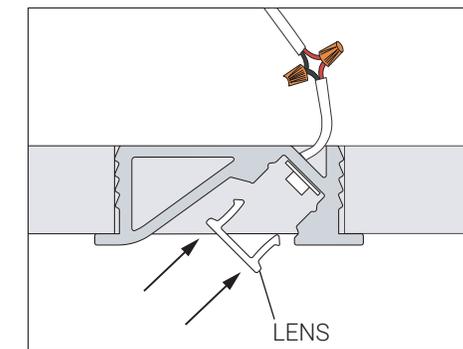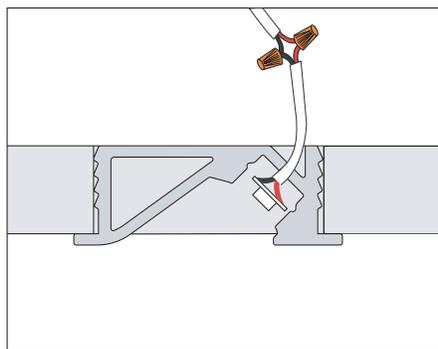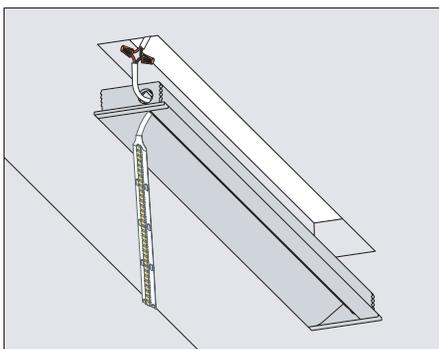


6. Pass the low-voltage power wires from the LED tape through the hole. Connect LED tape's lead wires to the in-wall rated low-voltage wire, matching polarity: Red is positive (+) and black is negative (-).

7. Remove the adhesive backing from the back of the LED tape. Apply the tape light to the channel's interior and route the lead wire to the back.

8. Install the LED diffuser onto the channel.

Naro Wall Wash Channel for Razorline Tape Lights

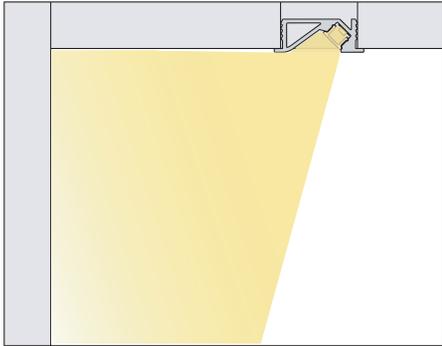

9. Turn on lights to test the installation.