

## Light efficiency:

n/a Lumen/Watt

## Light quality:

CRI: 93.8

## Color temperature:


3095 K

Output: 261 lm

Peak: 62.6 cd

Power: 0.00 W

PF: n/a

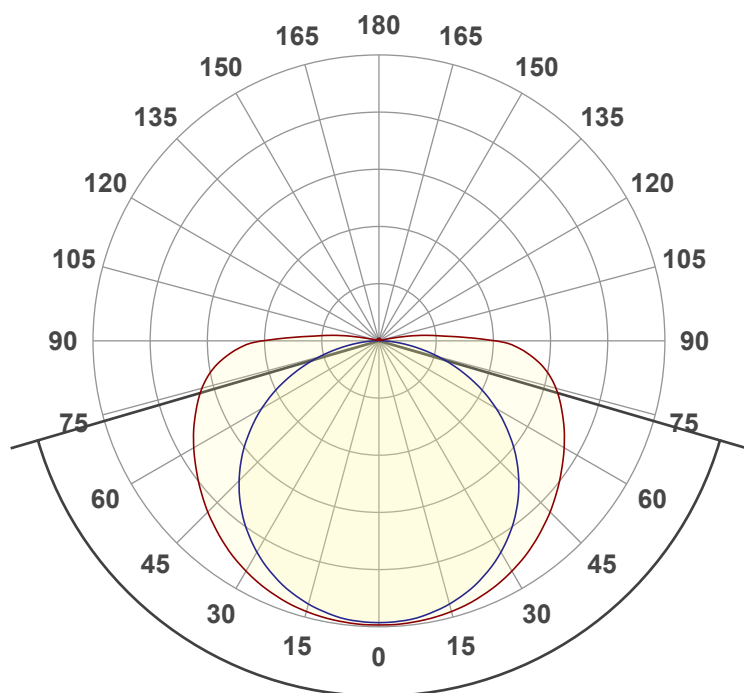


Beam angle

147.5°






CIE 1931  
x: 0.431  
y: 0.403

## Spectra

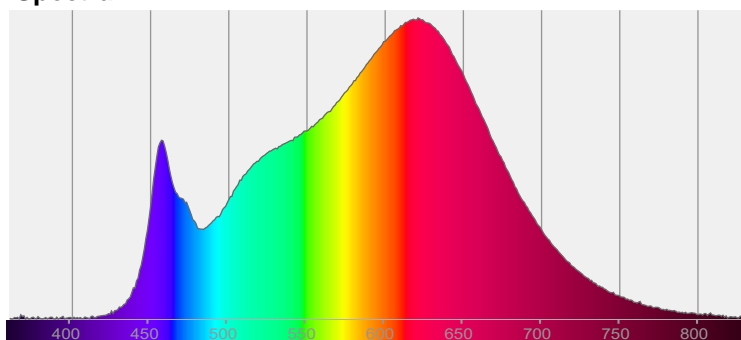


## Power

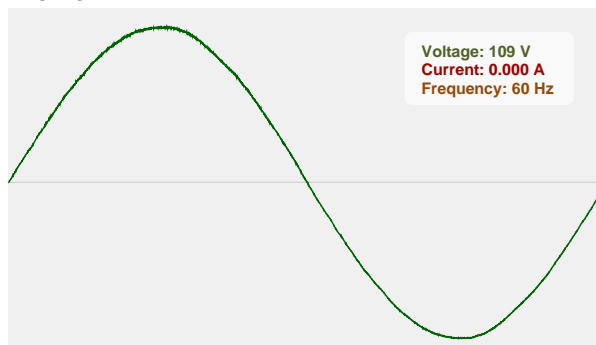


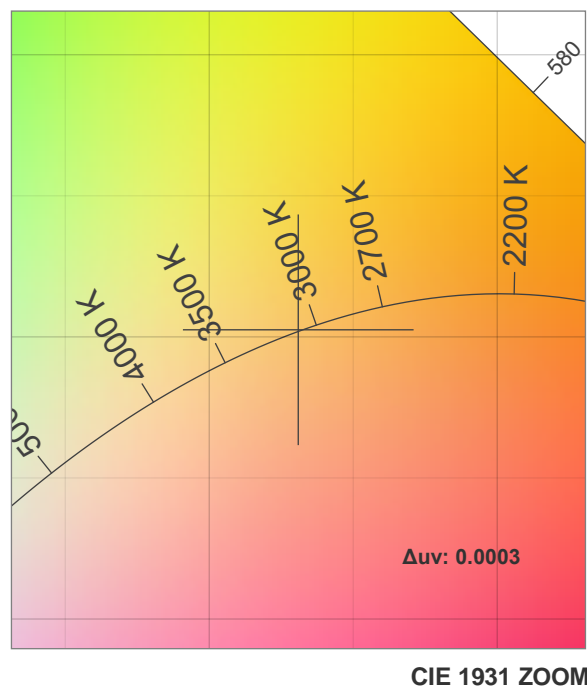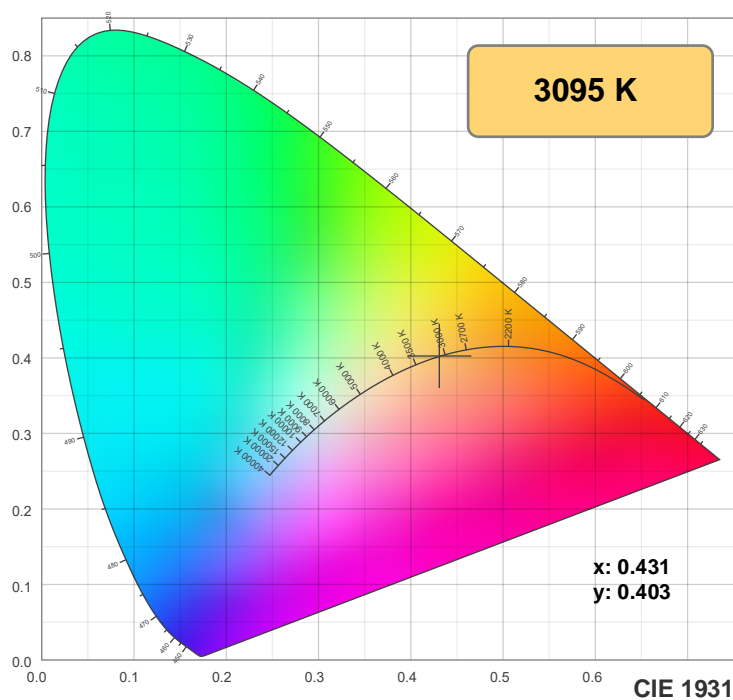

**TM30: 89.9**

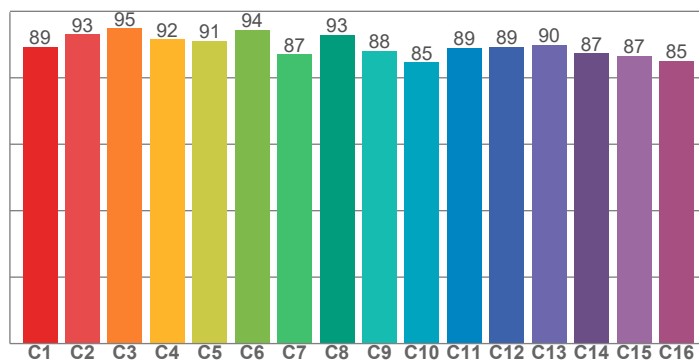

**CRI: 93.8 (R1-R8)**

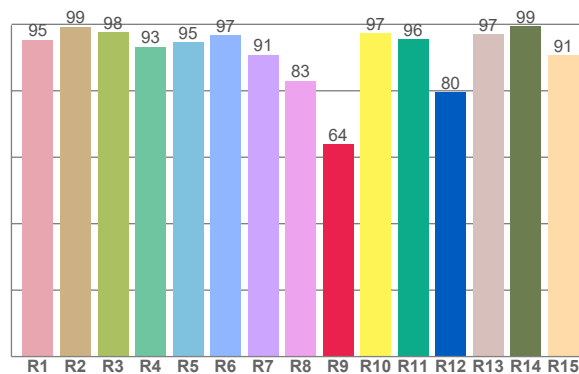

**CRI R values, only R1-R8 are used to calculate final CRI value**

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
95.4	99.3	97.5	93.3	94.6	96.6	90.9	83.0	64.0	97.3	95.6	79.5	97.0	99.4	90.6


**TM30 C values, 16 binned values out of total of 99 C values**

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
89.2	93.1	94.9	91.6	91.2	94.4	87.0	92.9	88.0	84.7	88.9	89.4	89.9	87.4	86.7	85.1

**CQS Q values**

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
86.6	94.0	92.4	89.2	89.5	90.9	94.3	95.0	96.0	96.7	96.6	95.3	94.1	88.6	88.3

**CQS: 91.7**

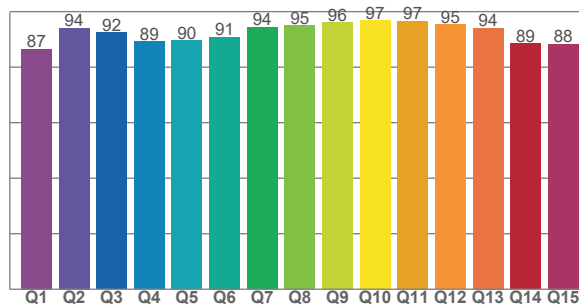

## Color parameters

Color temperature	Color rendering Index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3095 K	93.8	64.0	89.9	96.3	91.7	0.431	0.403	0.247	0.347	0.0003







**Rf 89.9**


Fidelity index Rf

**Rg 96.3**

Gamut index Rg

Hue Bin	R <sub>f</sub>	Shifts (%)	
		Chroma	Hue
1	89	-5%	2%
2	93	-2%	2%
3	95	-2%	1%
4	92	-5%	-3%
5	91	-8%	0%
6	94	-3%	1%
7	87	-7%	4%
8	93	-2%	4%
9	88	-1%	8%
10	85	1%	9%
11	89	4%	7%
12	89	6%	-3%
13	90	0%	-8%
14	87	2%	-10%
15	87	-4%	-5%
16	85	-3%	-10%

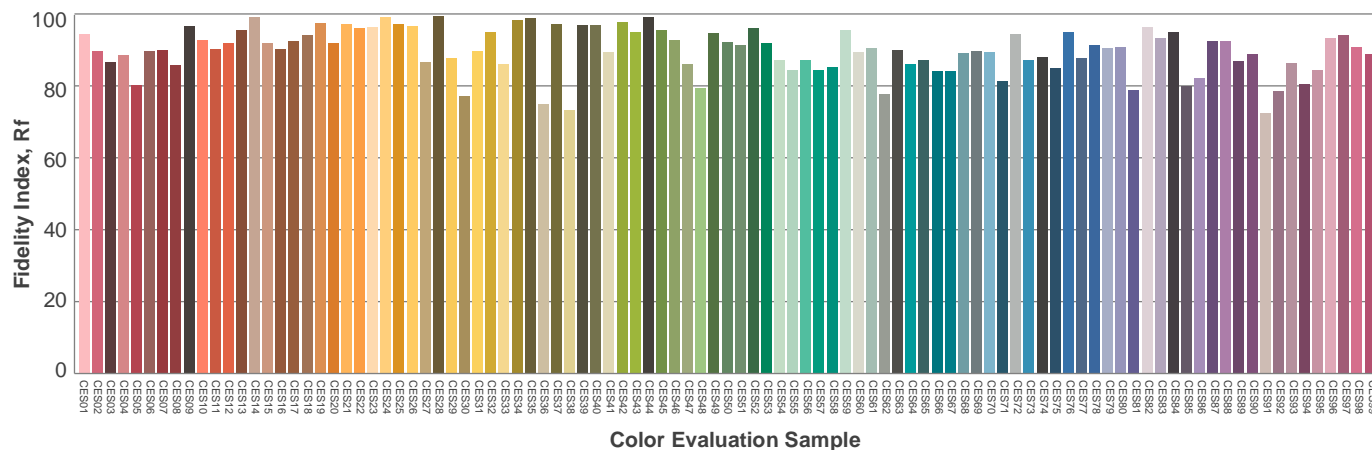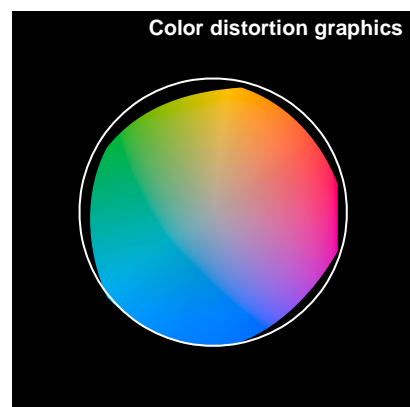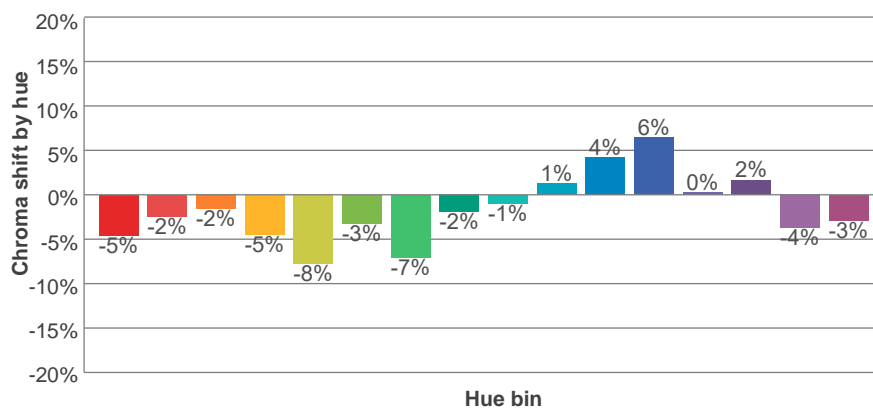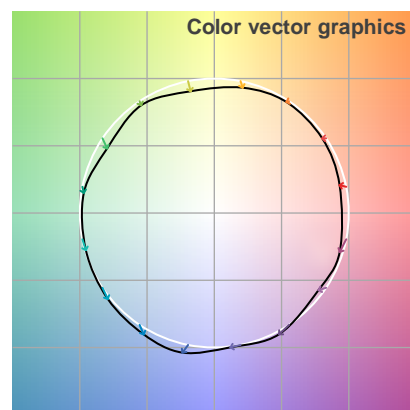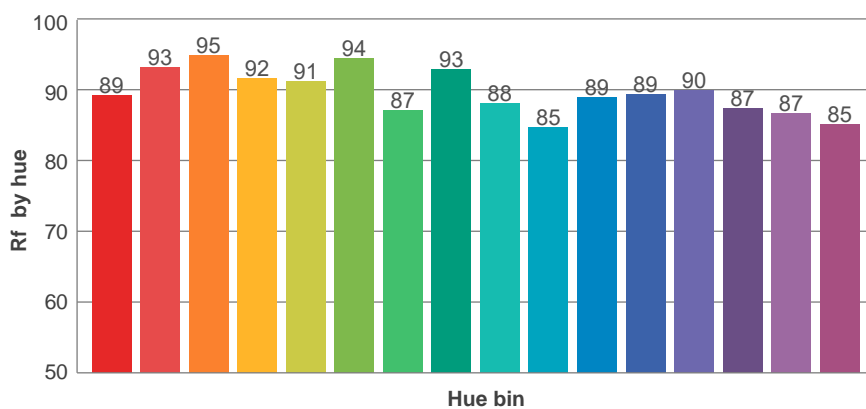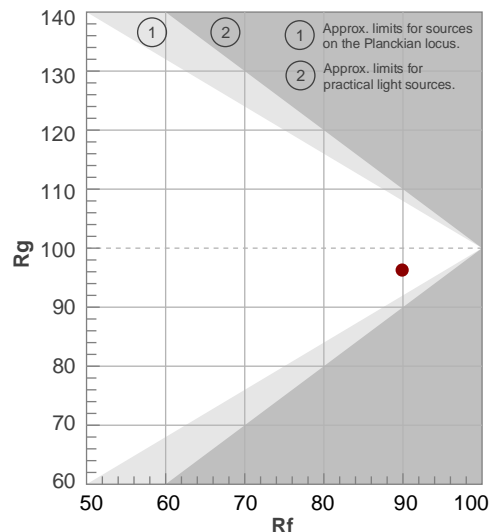

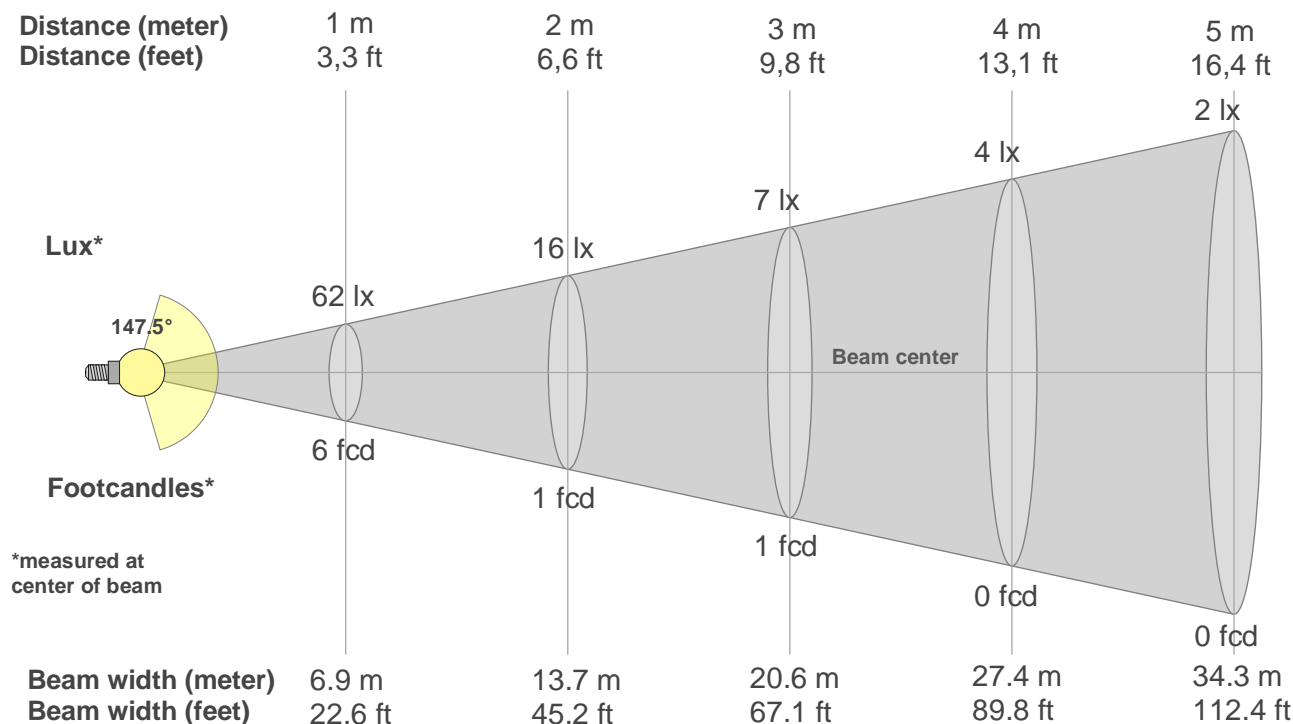

### Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
62lx	16lx	7lx	4lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx
5.8fcd	1.5fcd	0.6fcd	0.4fcd	0.2fcd	0.2fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd

### Intensities in 0° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
62.5	62.3	61.3	59.4	56.7	53.4	49.6	45.9	41.9	36.6	25.5	6.9	0.4	0.3	0.4	0.4	0.4	0.4	0.4	0.5
100%	100%	98%	95%	91%	85%	79%	73%	67%	59%	41%	11%	1%	1%	1%	1%	1%	1%	1%	1%

### Intensities in 90° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
62.5	61.4	59.1	55.4	50.2	43.6	35.7	26.7	16.9	7.4	1.0	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4
100%	98%	95%	89%	80%	70%	57%	43%	27%	12%	2%	1%	1%	1%	1%	1%	1%	1%	1%	1%

### Intensities in 180° c-plane


0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
62.5	62.3	61.3	59.4	56.7	53.4	49.6	45.9	41.9	36.6	25.5	6.9	0.4	0.3	0.4	0.4	0.4	0.4	0.4	0.5
100%	100%	98%	95%	91%	85%	79%	73%	67%	59%	41%	11%	1%	1%	1%	1%	1%	1%	1%	1%

### Intensities in 270° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
62.5	61.4	59.1	55.4	50.2	43.6	35.7	26.7	16.9	7.4	1.0	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4
100%	98%	95%	89%	80%	70%	57%	43%	27%	12%	2%	1%	1%	1%	1%	1%	1%	1%	1%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
147.5°	188.3°	197.2°	61.4%	39.4%

**iso-candela diagram**

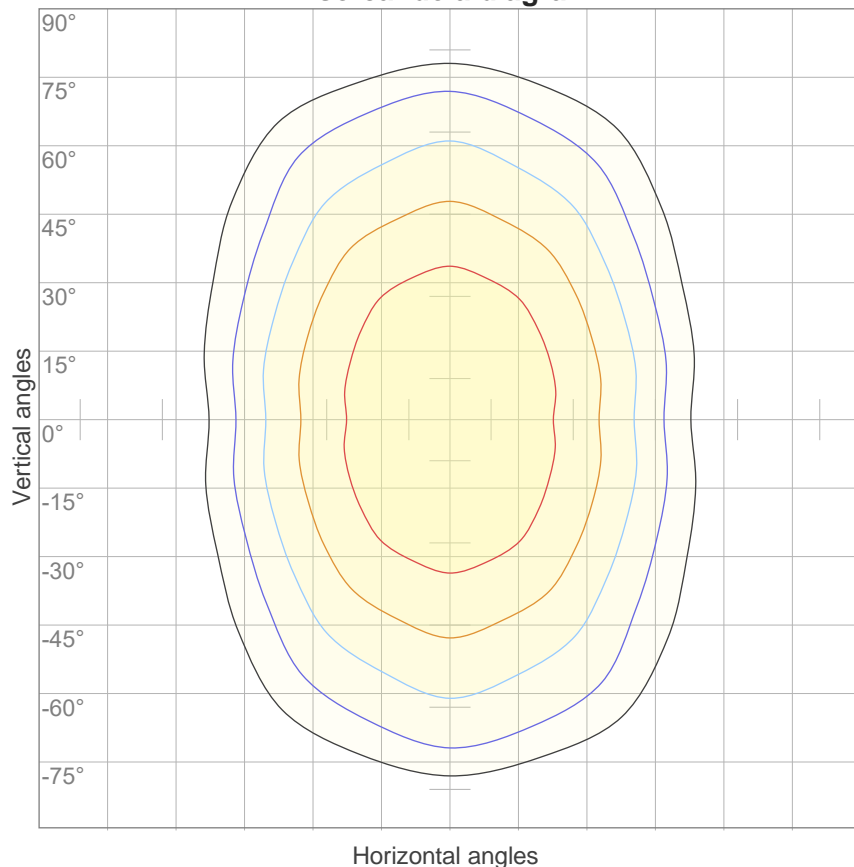


10%	6 cd
20%	12 cd
30%	19 cd
40%	25 cd
50%	31 cd
60%	37 cd
70%	44 cd
80%	50 cd
90%	56 cd

Conditions:

Number of c-planes: 12

Candela at center: 62 cd

**iso-lux diagram**

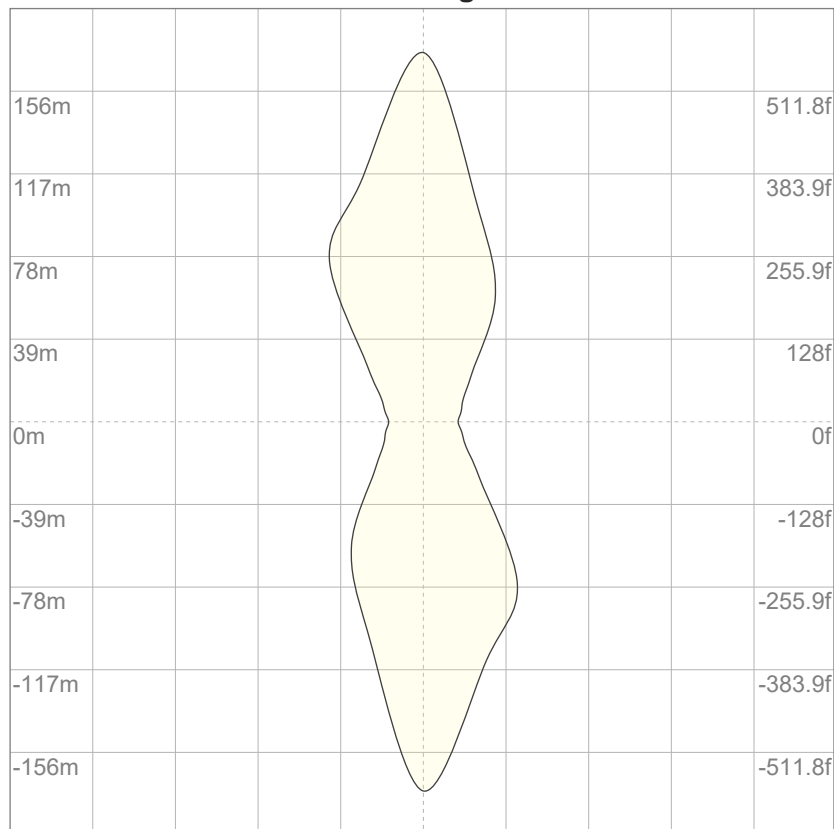

3%	18.7m lx
5%	31.2m lx
10%	62.5m lx
30%	0.187 lx
50%	0.312 lx

Conditions:

Number of c-planes: 12

Lux at center: 0.625 lx

*Lux distribution on a surface  
when lamp is mounted at 10  
meters from the surface.*

**Glare evaluation according to UGR**

p Ceiling	70	70	50	50	30	70	70	50	50	30
p Walls	50	30	50	30	30	50	30	50	30	30
p Floor	20	20	20	20	20	20	20	20	20	20
Room size X      Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
Variation of the observer position for the luminaire distance S										
n/a	n/a					n/a				
n/a	n/a					n/a				
n/a	n/a					n/a				
CIE 117-1995. Corrected glare indices referring to 261 lm total luminous flux										


UGR data could not be calculated due to missing/wrong symmetry. Goto Edit->Photometric->Corrections and select Correct asymmetry.

### Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	118	118	118	118	115	115	115	115	109	109	109	103	103	103	98	98	98	96
1	104	97	92	86	101	95	89	85	89	85	81	85	81	78	80	77	75	72
2	93	83	74	67	90	80	73	66	76	70	64	72	67	62	68	64	60	57
3	84	72	62	54	81	70	61	54	66	58	52	62	56	51	59	54	49	46
4	76	63	53	45	73	61	52	44	58	50	43	55	48	42	52	46	41	39
5	70	56	46	38	67	54	45	38	51	43	37	49	42	36	47	40	35	33
6	64	50	40	33	62	48	39	33	46	38	32	44	37	31	42	36	31	28
7	59	45	35	29	57	44	35	28	42	34	28	40	33	27	38	32	27	25
8	55	41	32	25	53	40	31	25	38	30	25	37	29	24	35	29	24	22
9	52	37	29	23	50	37	28	23	35	27	22	34	27	22	32	26	21	19
10	48	34	26	20	47	34	26	20	32	25	20	31	24	20	30	24	19	18

**LAMPS (number of lamps)**

**Luminaire budgetary diagram**

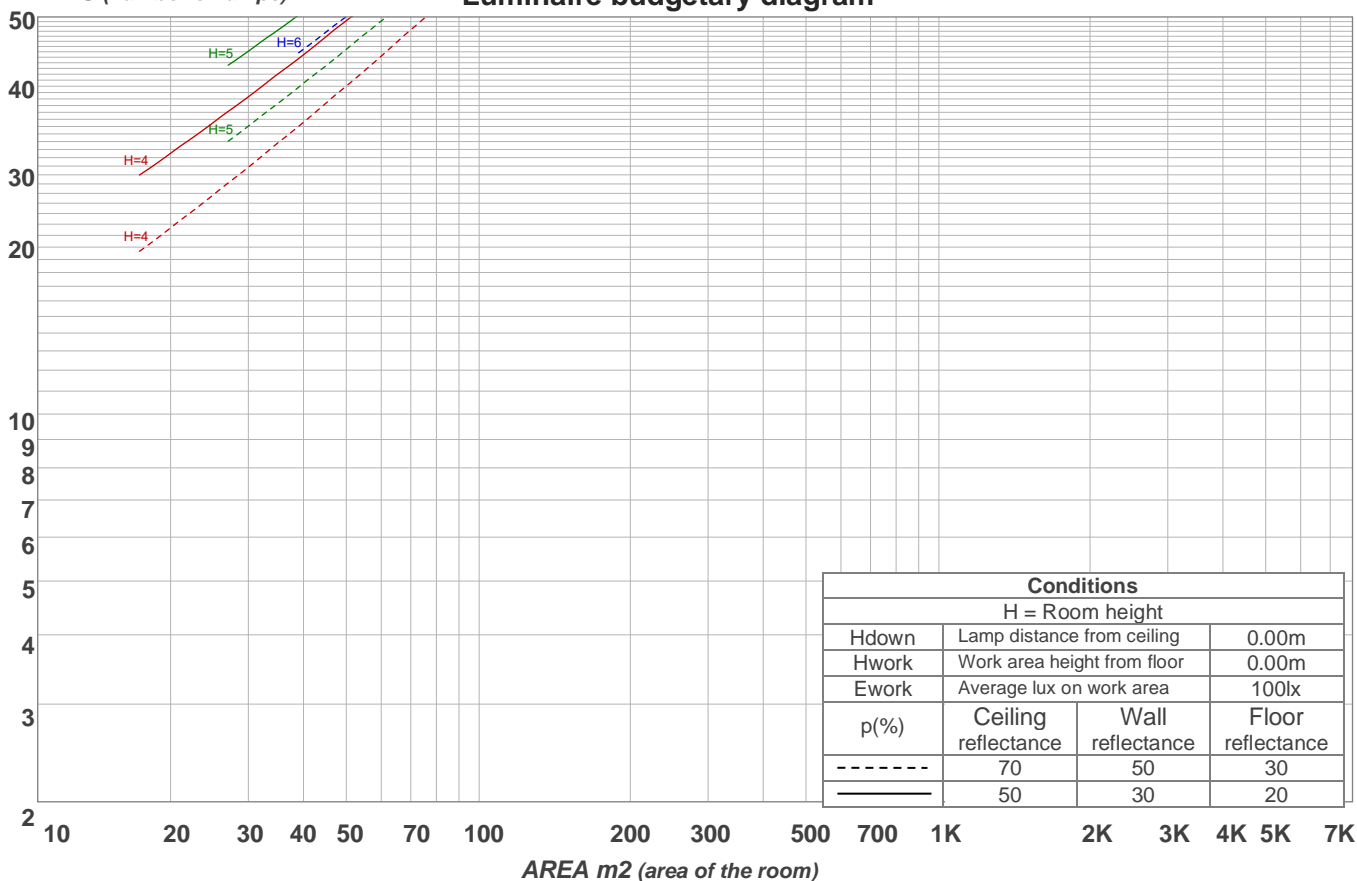


### Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
{LUM0-10}	17.2 lm	26.9 lm	33.9 lm	37.8 lm	38.2 lm	35.7 lm	31.0 lm	23.2 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
8.29 lm	0.840 lm	0.378 lm	0.354 lm	0.307 lm	0.257 lm	0.197 lm	0.121 lm	0.042 lm

**LCS table**


BUG rating:	B0 U1 G1	
Forward light	Lumens	Lumens %
Low(0-30):	25	9.6%
Medium(30-60):	54.9	21.1%
High(60-80):	33.4	12.8%
Very high(80-90):	11.6	4.4%
Back light		
Low(0-30):	25	9.6%
Medium(30-60):	54.9	21.1%
High(60-80):	33.4	12.8%
Very high(80-90):	11.6	4.4%
Uplight		
Low(90-100):	8.4	3.2%
High(100-180):	2.5	1%

**LCS graph**

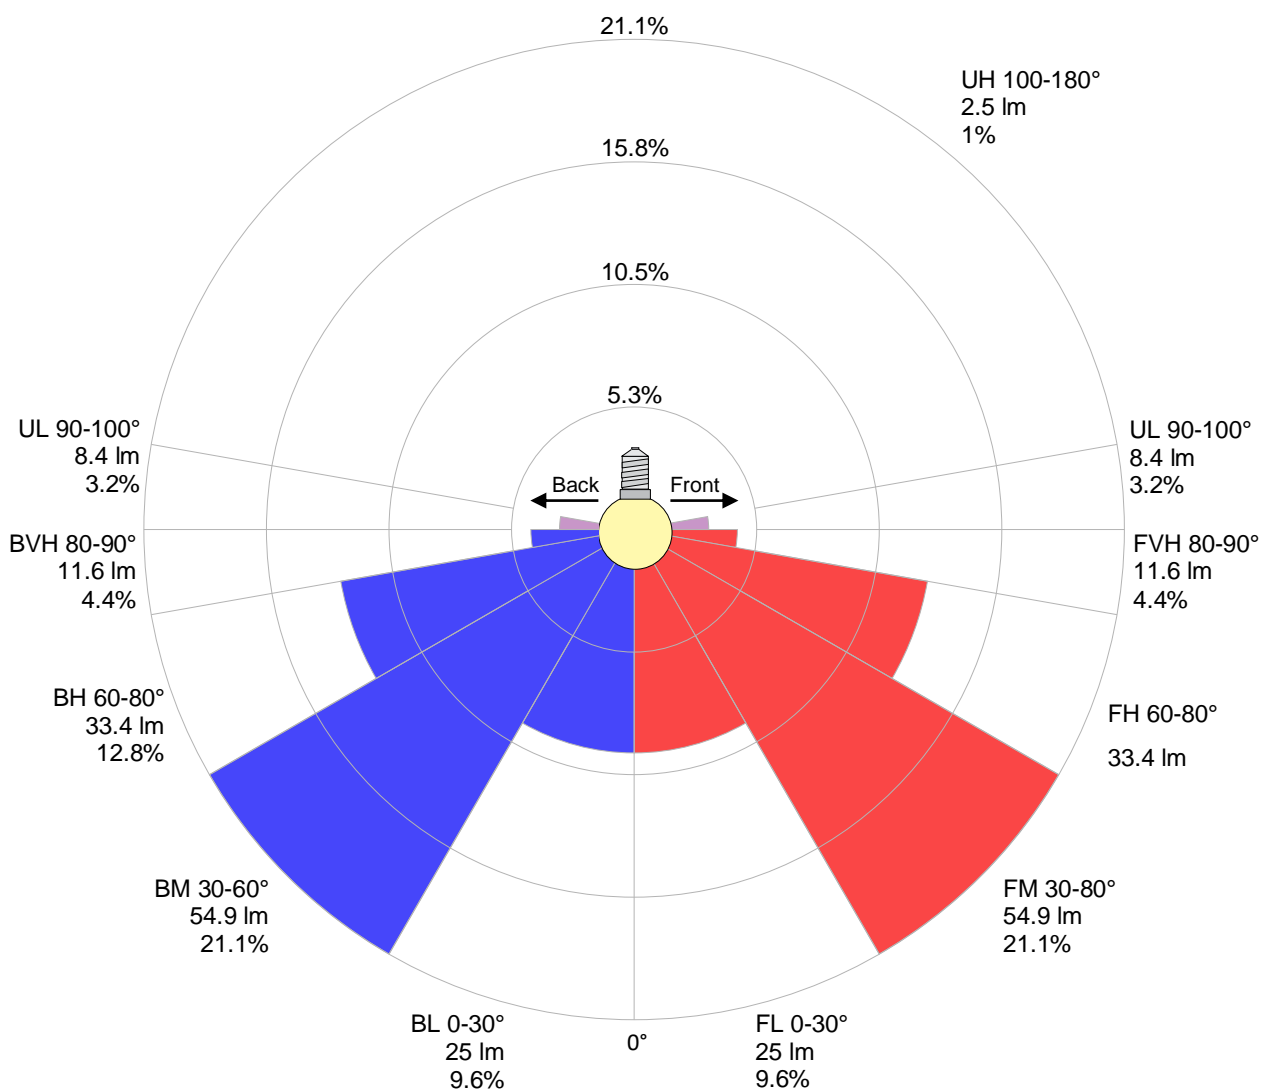



**Warmup curve**

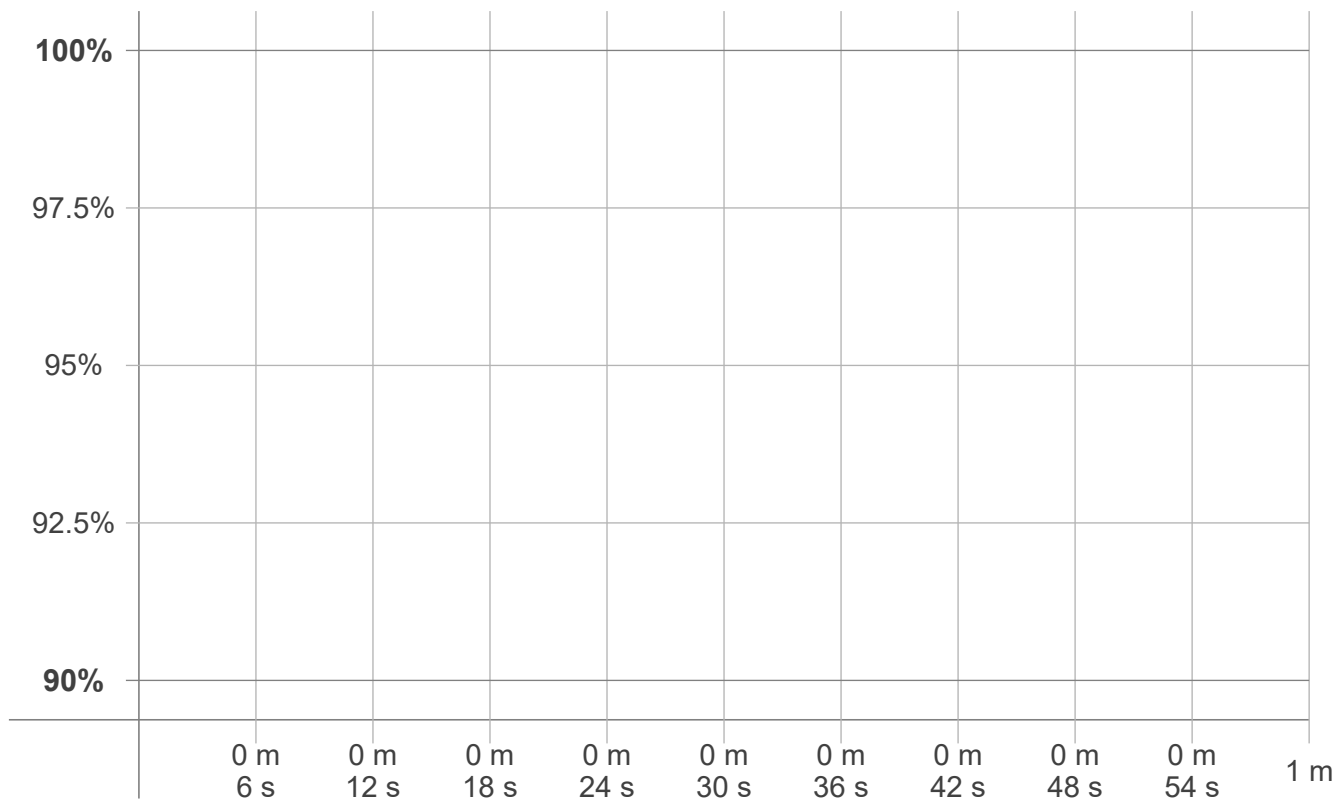

**Warmup result**

Warmup time:	n/a
Warmup variation	n/a%

**Warmup conditions**

Stable period:	n/a
Stable change max:	n/a%
Minimum time:	n/a

**Color temperature change**

CCT start	CCT change	CCT end
n/a K	n/a K	3095 K

**Output change**

Output start	Output change	Output end
n/a lm	n/a lm	261 lm

**Flicker curve (complete sampled flicker signal)**



**Flicker frame (frame of one flicker period)**



**Flicker FFT (frequency scope of flicker curve)**



**Flicker results:**

Flicker frequency:		n/a Hz	
Flicker index:	n/a	JA8/10 40Hz	n/a %
Flicker percentage:	n/a %	JA8/10 90Hz	n/a %
SVM: (Visual flicker)	n/a	JA8/10 200Hz	n/a %
PstLM	n/a	JA8/10 400Hz	n/a %
Mp	n/a	JA8/10 1000Hz	n/a %

**Flicker conditions:**

Sample rate:	n/a samples/second
--------------	--------------------