

## Light efficiency:

n/a Lumen/Watt

## Light quality:

CRI: 93.6

## Color temperature:


3046 K

Output: 245 lm

Peak: 63.8 cd

Power: 0.00 W

PF: n/a

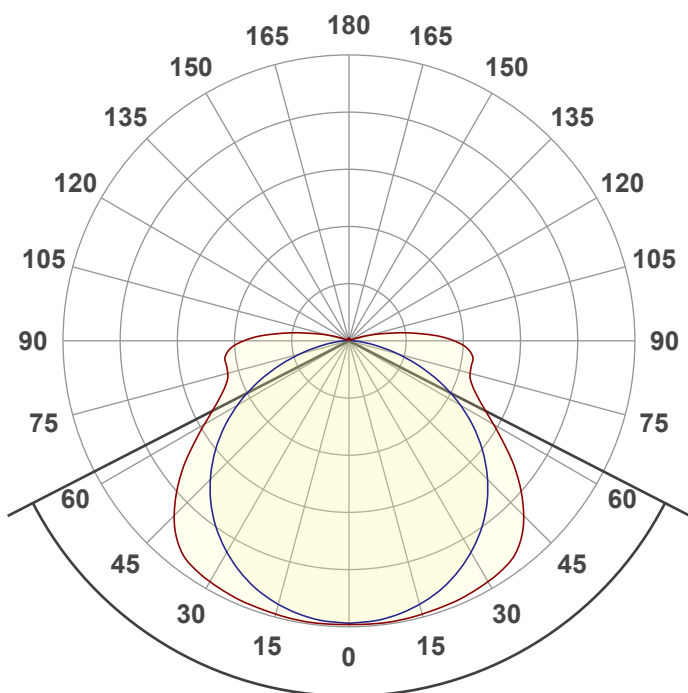


Beam angle **125.7°**






CIE 1931  
x: 0.434  
y: 0.404

## Spectra

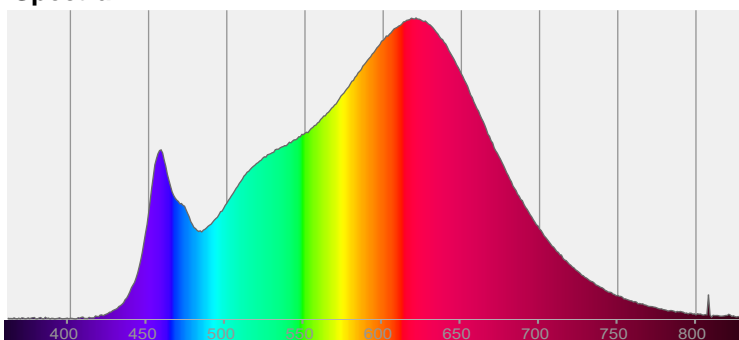


## Power

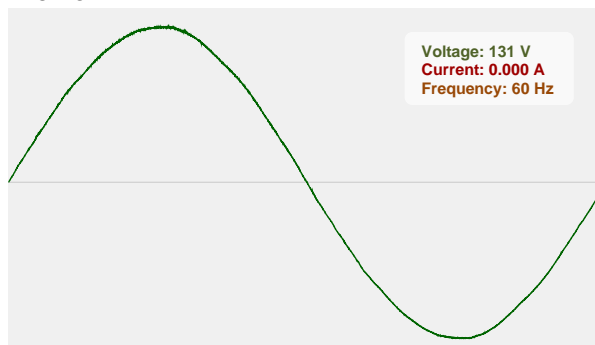


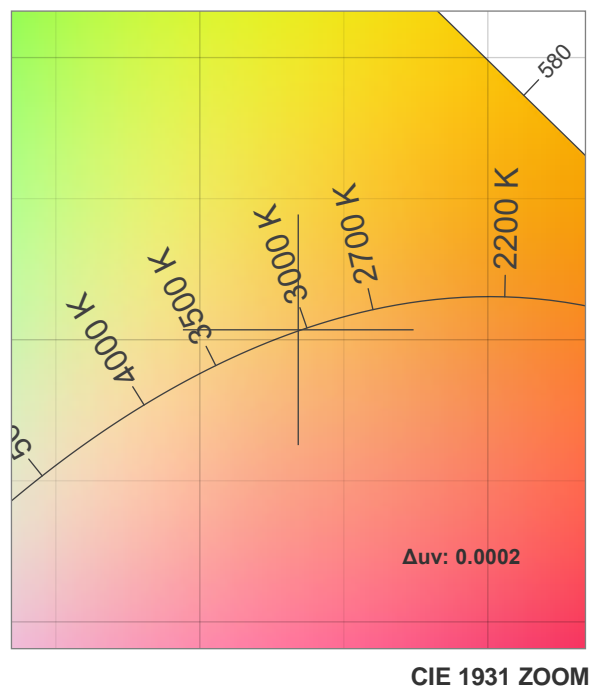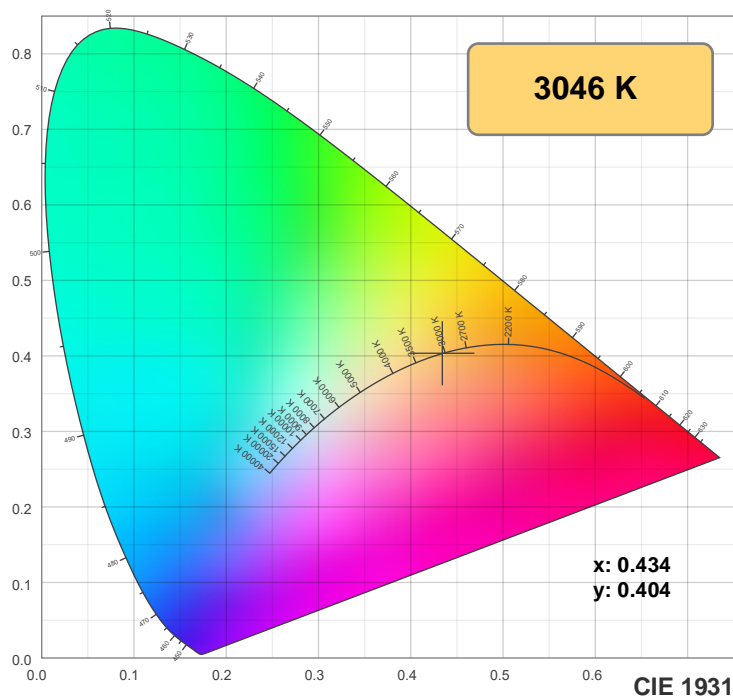

**TM30: 89.9**

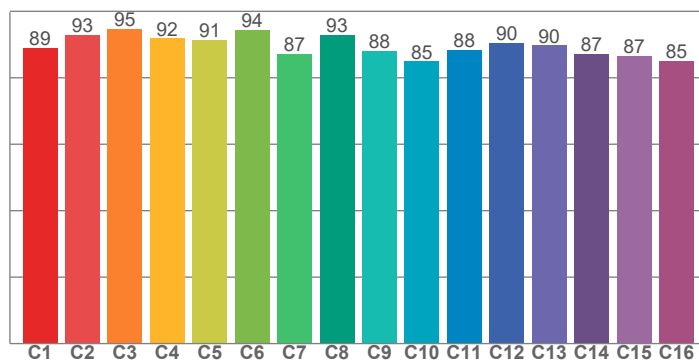

**CRI: 93.6 (R1-R8)**

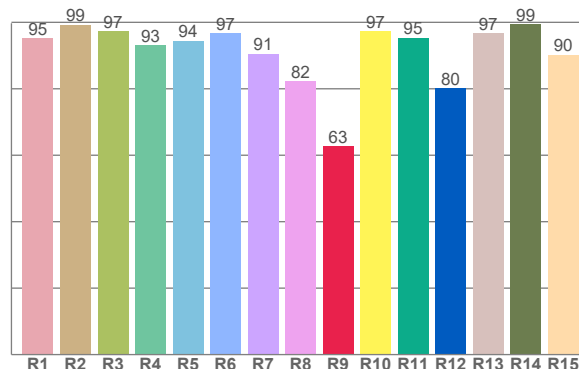

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
95.1	99.2	97.3	93.0	94.5	96.7	90.6	82.3	62.6	97.2	95.4	80.2	96.7	99.4	90.2


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
89.1	92.9	94.7	91.8	91.4	94.4	87.3	93.0	88.2	84.9	88.3	90.4	89.7	87.2	86.6	85.1

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
86.5	94.0	92.5	89.2	89.5	90.9	94.1	94.7	96.0	96.8	96.3	95.0	93.8	88.1	88.0

**CQS: 91.5**

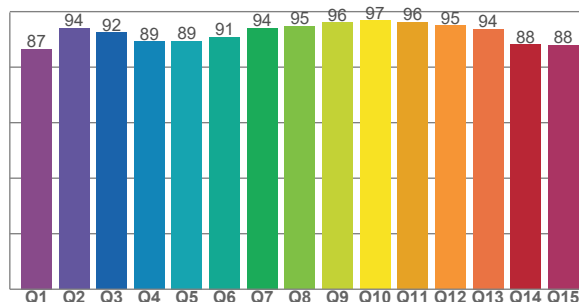

### Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	$\Delta uv$
3046 K	93.6	62.6	89.9	96.1	91.5	0.434	0.404	0.249	0.347	0.0002






**Rf 89.9**


## Fidelity index $R_f$

## Rg 96.1

## Gamut index Rg

		Shifts (%)	
Hue Bin	$R_i$	Chroma	Hue
1	89	-5%	2%
2	93	-3%	2%
3	95	-2%	1%
4	92	-4%	-2%
5	91	-8%	0%
6	94	-3%	1%
7	87	-7%	4%
8	93	-2%	4%
9	88	-1%	8%
10	85	1%	9%
11	88	5%	8%
12	90	5%	-2%
13	90	0%	-8%
14	87	2%	-10%
15	87	-4%	-5%
16	85	-3%	-10%

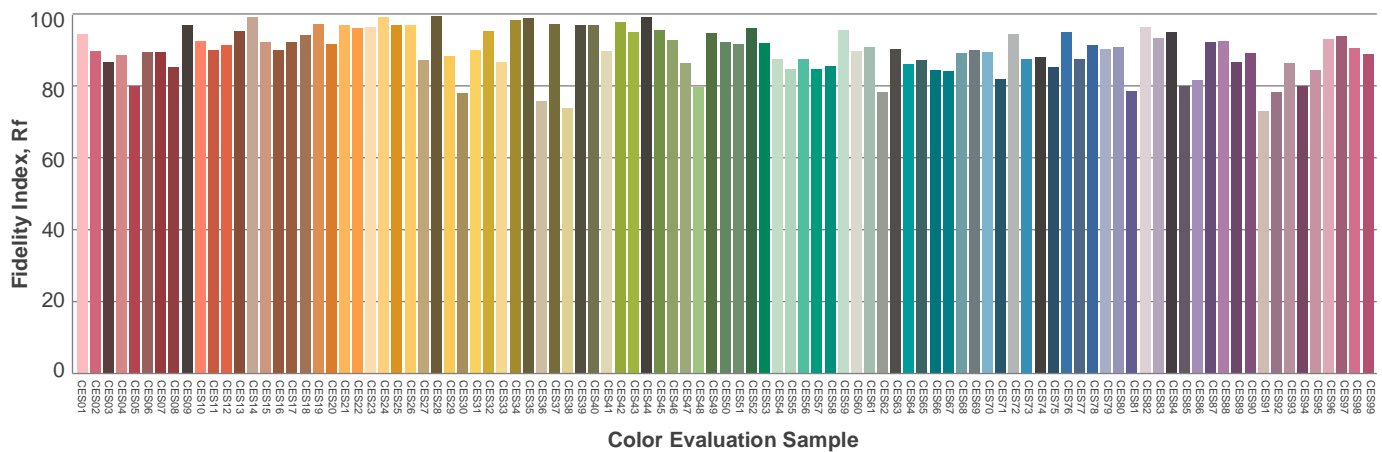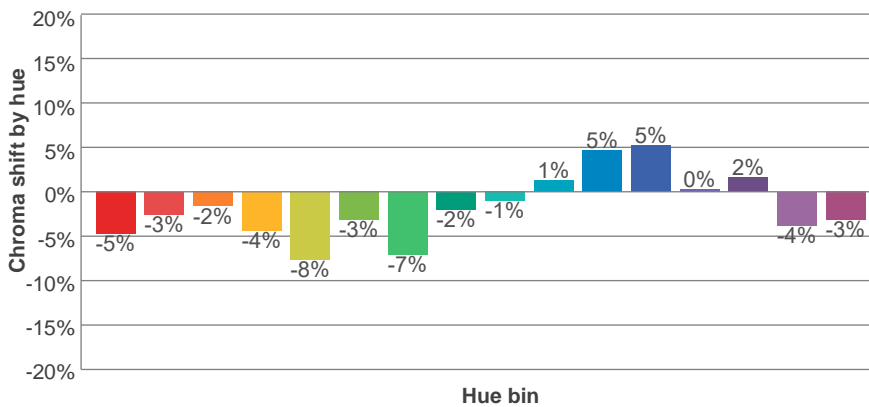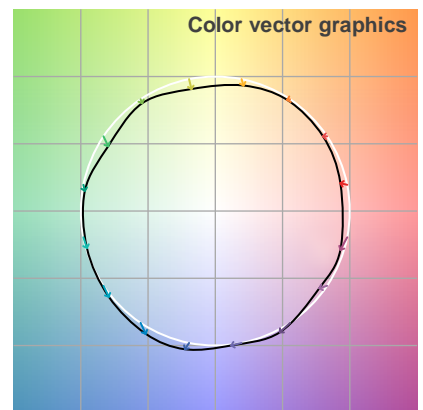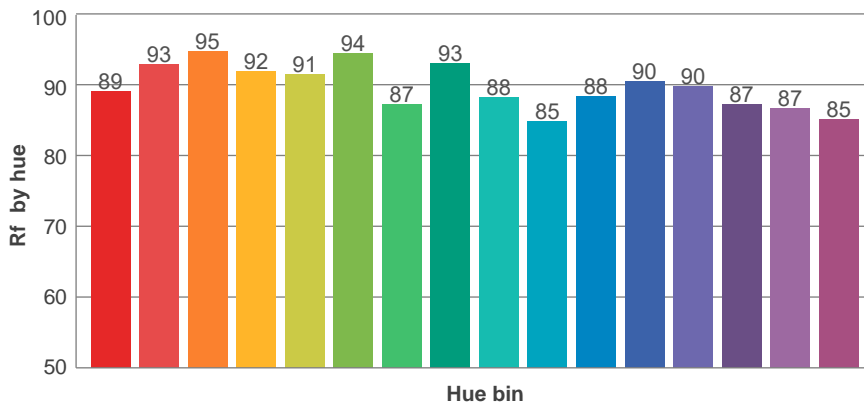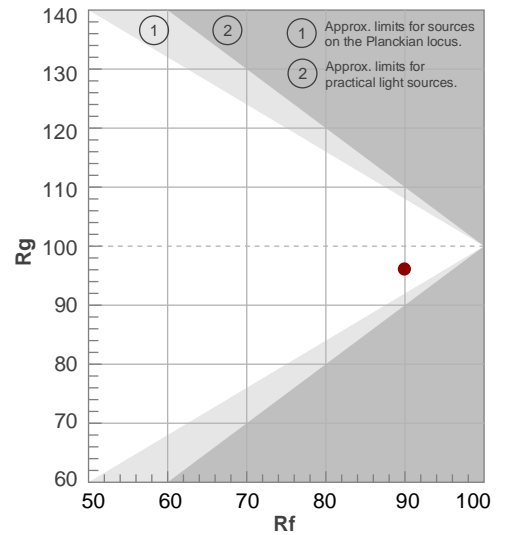

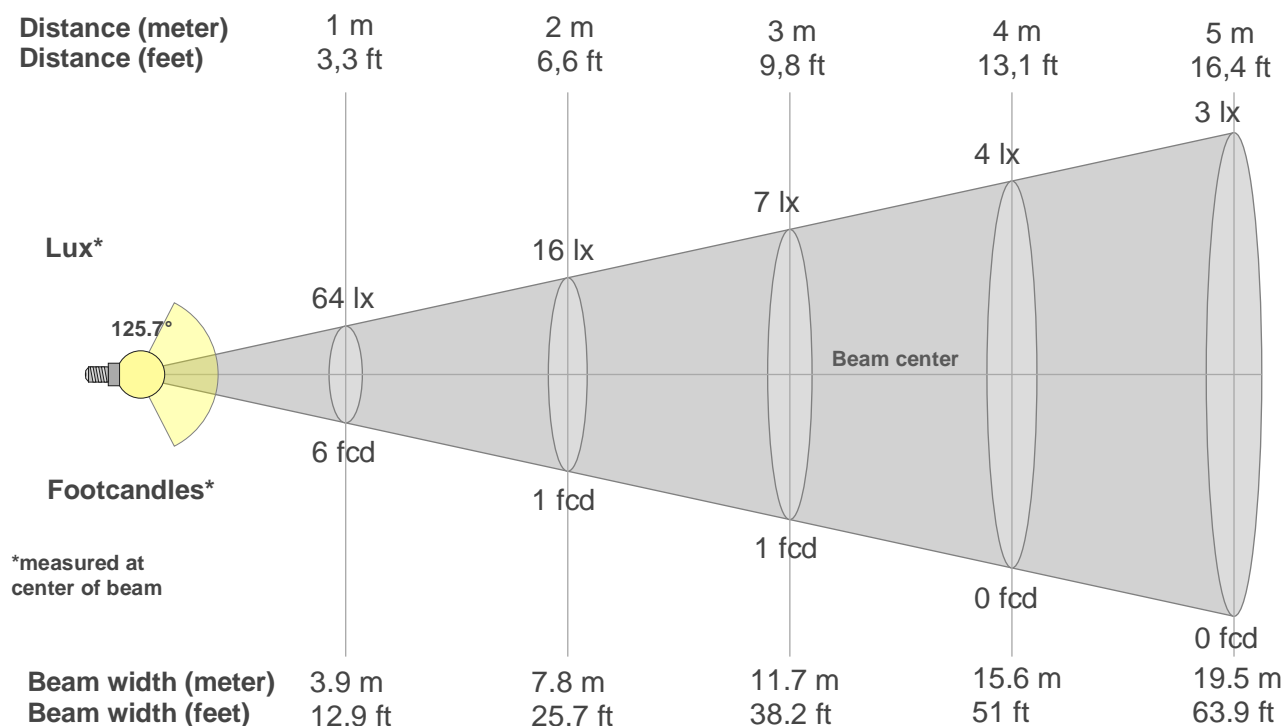

### Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
64lx	16lx	7lx	4lx	3lx	2lx	1lx	1lx	1lx	1lx	1lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx
5.9fcd	1.5fcd	0.7fcd	0.4fcd	0.2fcd	0.2fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd

### Intensities in 0° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
63.5	63.8	63.4	62.8	61.2	55.3	45.0	34.4	28.8	28.0	23.4	11.7	3.1	0.5	0.4	0.4	0.4	0.4	0.4	0.5
100%	100%	100%	99%	96%	87%	71%	54%	45%	44%	37%	18%	5%	1%	1%	1%	1%	1%	1%	1%

### Intensities in 90° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
63.5	62.6	60.3	56.4	51.0	44.0	35.4	25.5	14.9	5.6	1.2	0.6	0.4	0.3	0.3	0.4	0.4	0.4	0.5	0.5
100%	98%	95%	89%	80%	69%	56%	40%	23%	9%	2%	1%	1%	1%	1%	1%	1%	1%	1%	1%

### Intensities in 180° c-plane


0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
63.5	63.8	63.4	62.8	61.2	55.3	45.0	34.4	28.8	28.0	23.4	11.7	3.1	0.5	0.4	0.4	0.4	0.4	0.4	0.5
100%	100%	100%	99%	96%	87%	71%	54%	45%	44%	37%	18%	5%	1%	1%	1%	1%	1%	1%	1%

### Intensities in 270° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
63.5	62.6	60.3	56.4	51.0	44.0	35.4	25.5	14.9	5.6	1.2	0.6	0.4	0.3	0.3	0.4	0.4	0.4	0.5	0.5
100%	98%	95%	89%	80%	69%	56%	40%	23%	9%	2%	1%	1%	1%	1%	1%	1%	1%	1%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
125.7°	190.4°	206.2°	66.7%	43.6%

**iso-candela diagram**

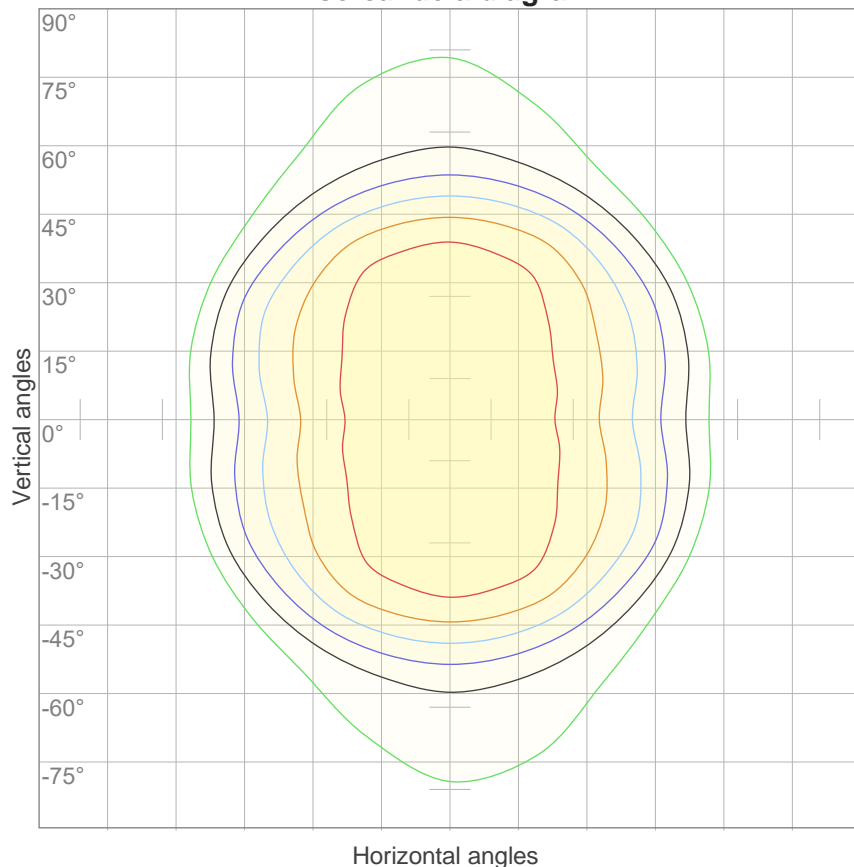


10%	6 cd
20%	13 cd
30%	19 cd
40%	25 cd
50%	32 cd
60%	38 cd
70%	44 cd
80%	51 cd
90%	57 cd

Conditions:

Number of c-planes: 12

Candela at center: 64 cd

**iso-lux diagram**

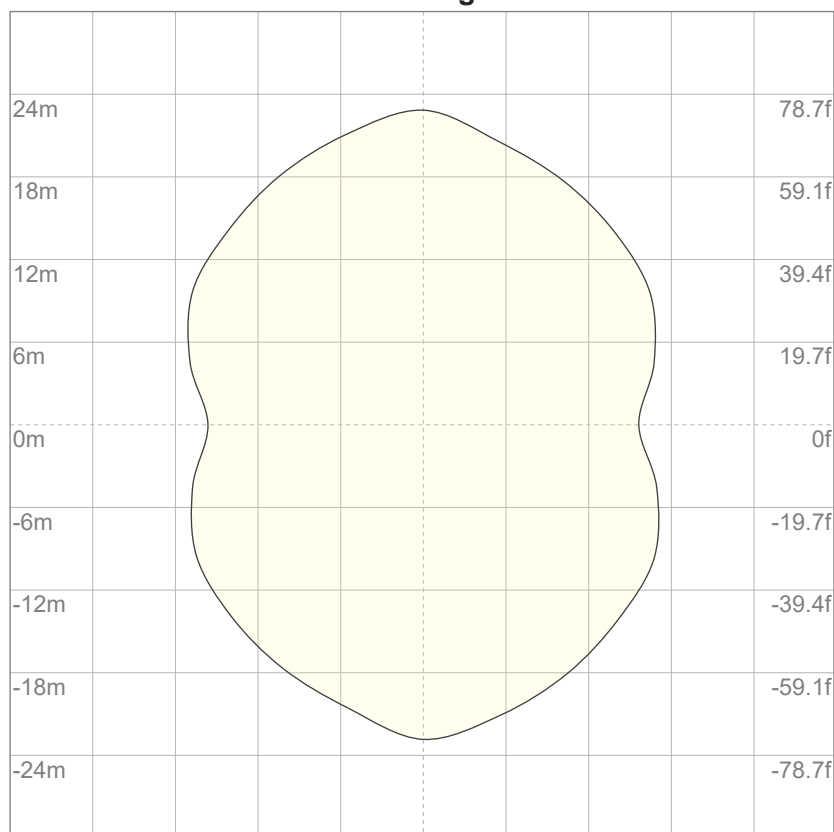

3%	19.1m lx
5%	31.8m lx
10%	63.5m lx
30%	0.191 lx
50%	0.318 lx

Conditions:

Number of c-planes: 12

Lux at center: 0.635 lx

*Lux distribution on a surface  
when lamp is mounted at 10  
meters from the surface.*

**Glare evaluation according to UGR**

p Ceiling	70	70	50	50	30	70	70	50	50	30
p Walls	50	30	50	30	30	50	30	50	30	30
p Floor	20	20	20	20	20	20	20	20	20	20
Room size X      Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
Variation of the observer position for the luminaire distance S										
n/a	n/a					n/a				
n/a	n/a					n/a				
n/a	n/a					n/a				
CIE 117-1995. Corrected glare indices referring to 245 lm total luminous flux										


UGR data could not be calculated due to missing/wrong symmetry. Goto Edit->Photometric->Corrections and select Correct asymmetry.

### Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	118	118	118	118	114	114	114	114	108	108	108	102	102	102	97	97	97	94
1	105	99	94	89	101	96	91	87	91	87	83	86	83	80	81	79	76	74
2	95	85	77	71	91	83	76	70	78	72	67	74	69	65	70	66	62	60
3	86	74	65	58	83	72	64	57	68	61	55	65	59	54	61	56	52	49
4	78	65	56	49	75	64	55	48	60	53	47	57	51	45	54	49	44	42
5	72	58	48	41	69	57	48	41	54	46	40	51	44	39	49	43	38	36
6	66	52	43	36	64	51	42	35	48	40	35	46	39	34	44	38	33	31
7	61	47	38	31	59	46	37	31	44	36	30	42	35	30	40	34	29	27
8	57	43	34	28	55	42	33	28	40	32	27	38	31	26	37	31	26	24
9	53	39	31	25	51	38	30	25	37	29	24	35	28	24	34	28	23	21
10	50	36	28	22	48	35	27	22	34	27	22	32	26	21	31	25	21	19

**LAMPS (number of lamps)**

**Luminaire budgetary diagram**

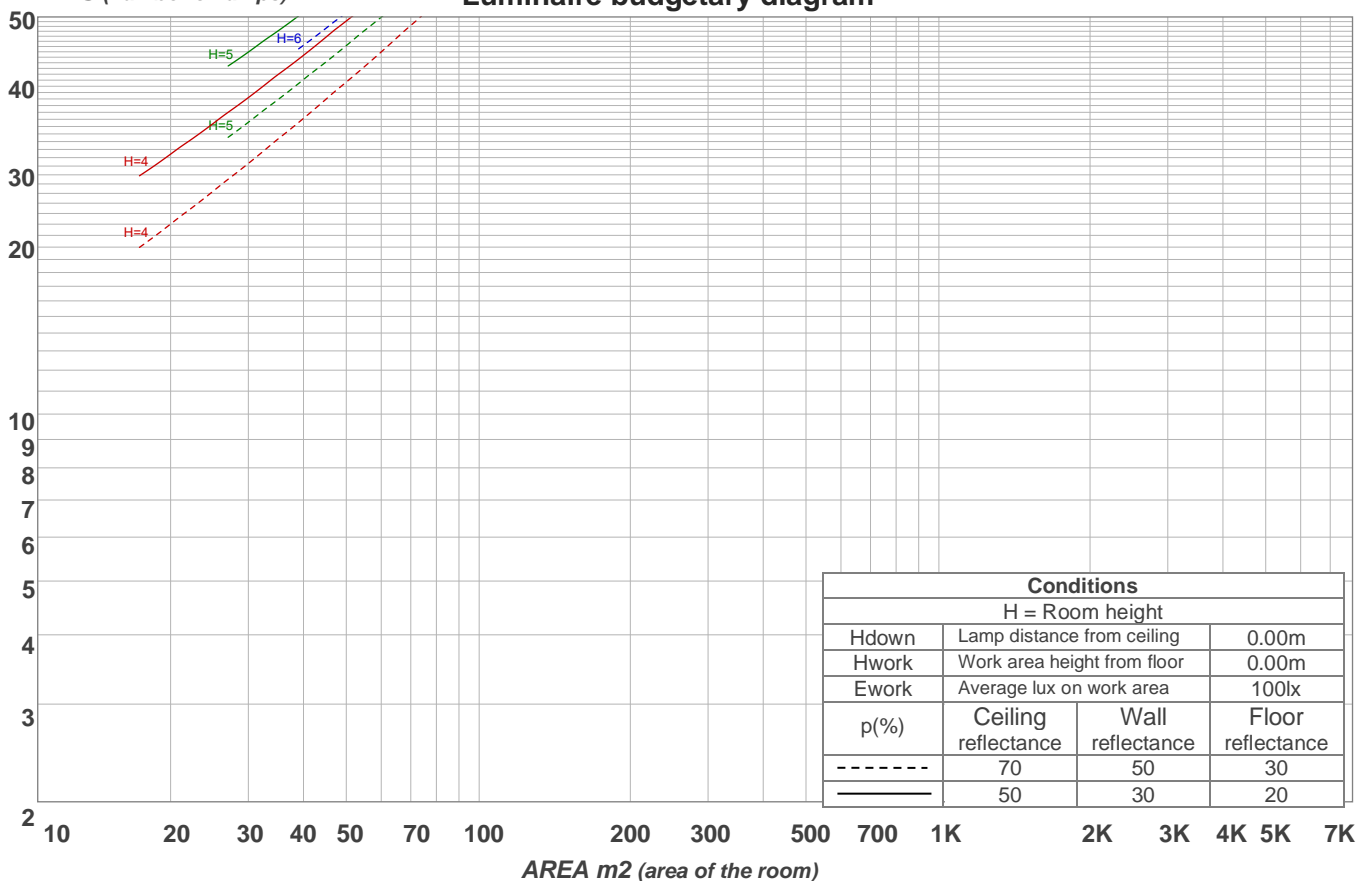


### Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
{LUM0-10}	17.7 lm	27.9 lm	35.7 lm	39.4 lm	36.8 lm	28.8 lm	21.3 lm	17.3 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
9.96 lm	2.57 lm	0.458 lm	0.309 lm	0.284 lm	0.252 lm	0.195 lm	0.125 lm	0.047 lm

**LCS table**


BUG rating:	B0 U1 G0	
Forward light	Lumens	Lumens %
Low(0-30):	25.8	10.5%
Medium(30-60):	55.9	22.8%
High(60-80):	25.1	10.3%
Very high(80-90):	8.6	3.5%
Back light		
Low(0-30):	25.8	10.5%
Medium(30-60):	55.9	22.8%
High(60-80):	25.1	10.3%
Very high(80-90):	8.6	3.5%
Uplight		
Low(90-100):	10	4.1%
High(100-180):	4.3	1.8%

**LCS graph**

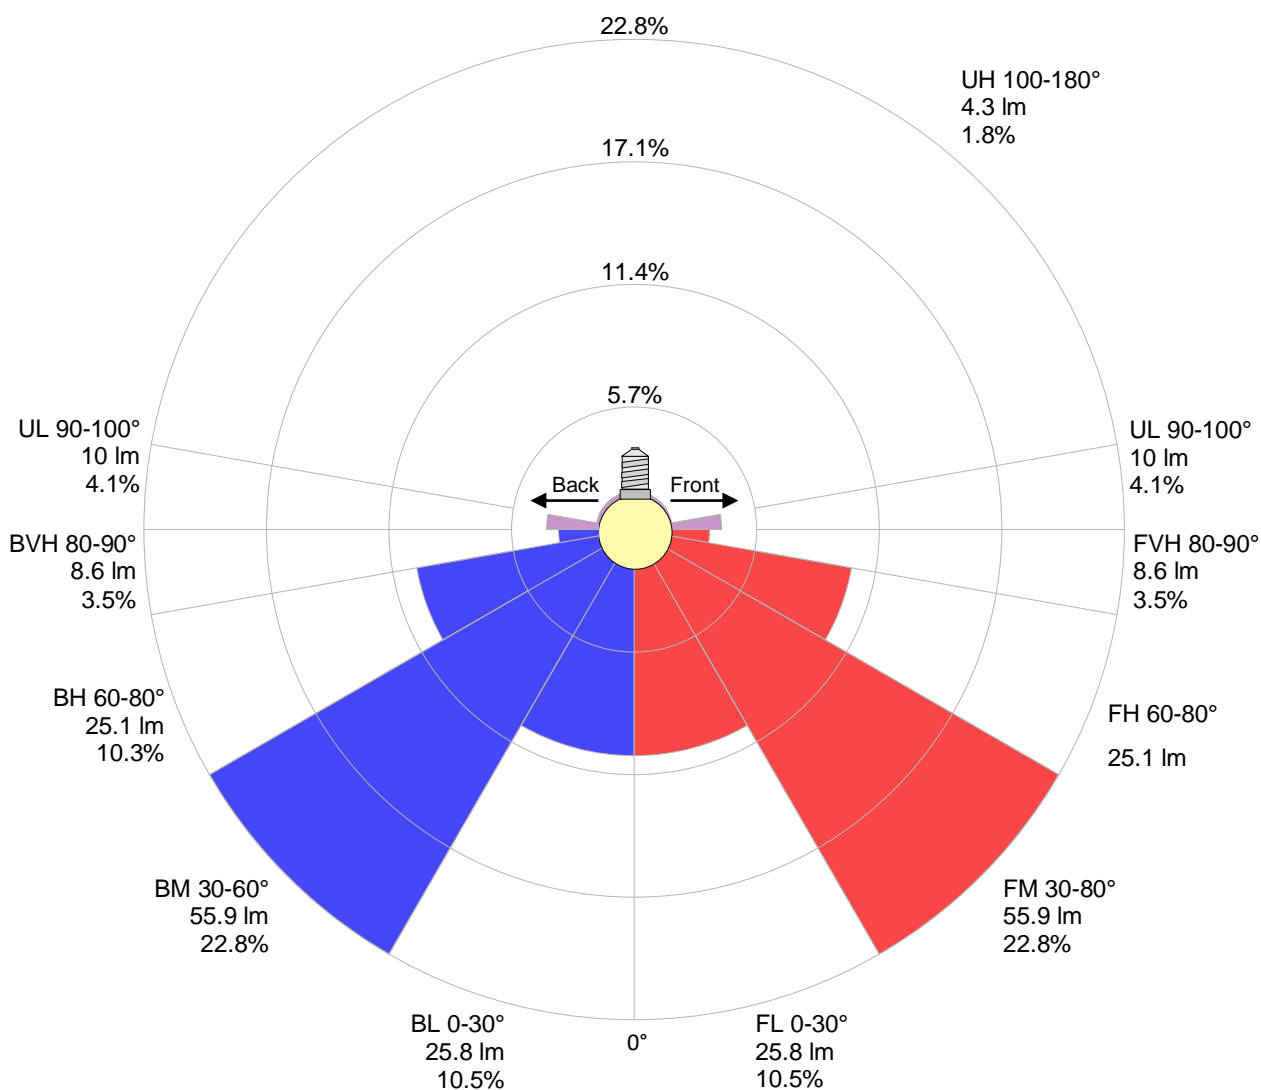



### Warmup curve

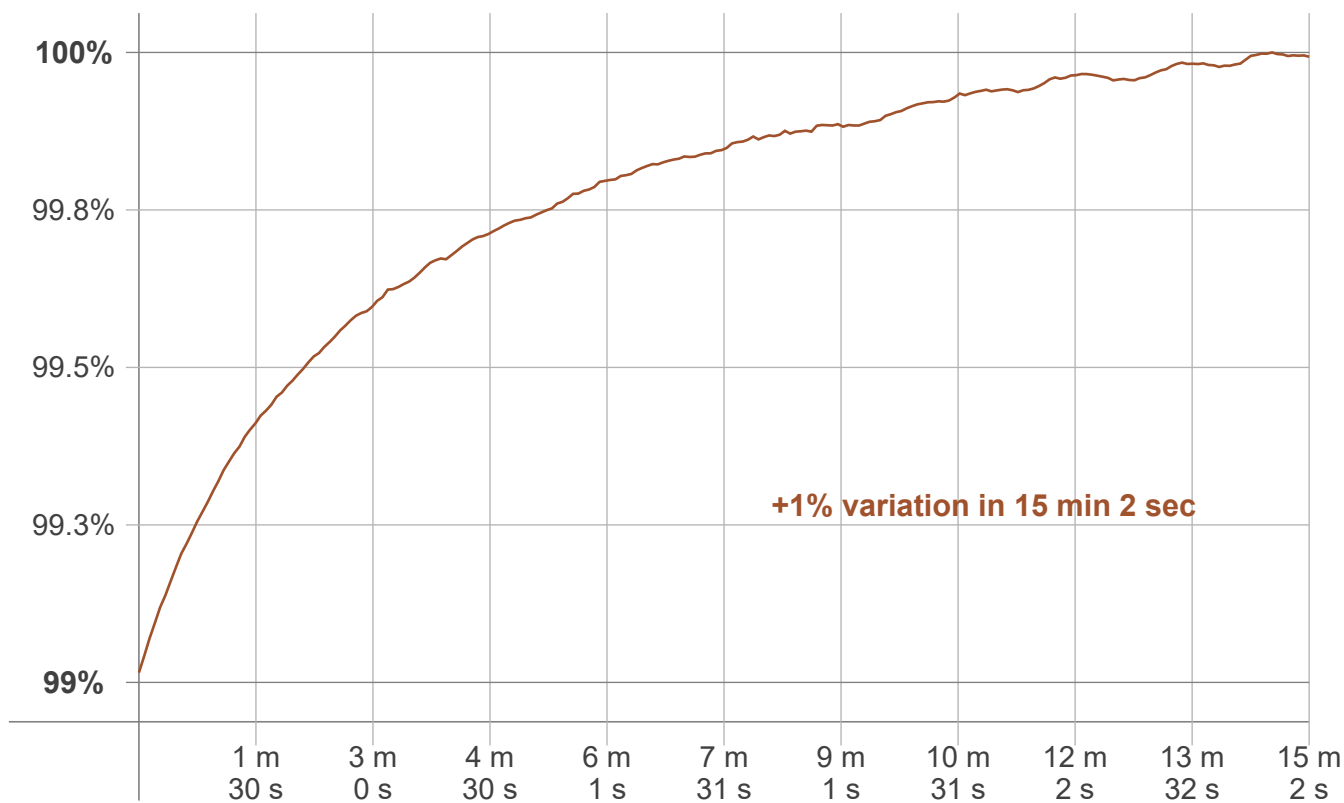

### Warmup result

Warmup time:	Lamp stabilized in 15 min 2 sec
Warmup variation	+1.0%

### Warmup conditions

Stable period:	15 min
Stable change max:	2.0%
Minimum time:	15 min

### Color temperature change

CCT start	CCT change	CCT end
3053 K	-7 K	3046 K

### Output change

Output start	Output change	Output end
243 lm	+2 lm	245 lm

**Flicker curve (complete sampled flicker signal)**



**Flicker frame (frame of one flicker period)**



**Flicker FFT (frequency scope of flicker curve)**



**Flicker results:**

Flicker frequency:		n/a Hz	
Flicker index:	n/a	JA8/10 40Hz	n/a %
Flicker percentage:	n/a %	JA8/10 90Hz	n/a %
SVM: (Visual flicker)	n/a	JA8/10 200Hz	n/a %
PstLM	n/a	JA8/10 400Hz	n/a %
Mp	n/a	JA8/10 1000Hz	n/a %

**Flicker conditions:**

Sample rate:	n/a samples/second
--------------	--------------------