


2600K

Spectrum

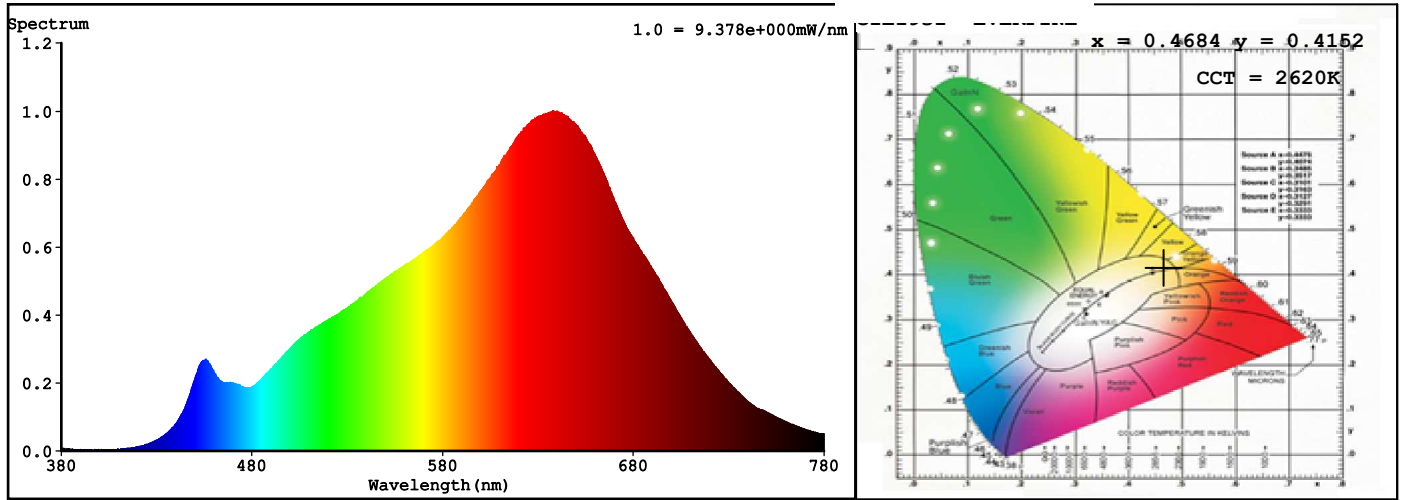

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4684$ $y = 0.4152$ / $u' = 0.2659$ $v' = 0.5304$ ($duv=1.02e-03$)

CCT= 2620K Prcp WL: $L_d=584.3nm$ Purity=65.2%

Peak WL: $L_p=638nm$ FWHM: $=145.3nm$ Ratio:R=27.7% G=69.7% B=2.6%

Render Index: $R_a = 97.9$ TM30: $R_f=94$ $R_g=99$

R1 =100 R2 =100 R3 =99 R4 =99 R5 =99 R6 =97 R7 =96
 R8 =94 R9 =88 R10=99 R11=97 R12=90 R13=100 R14=98 R15=97

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters


Flux = 385.82 lm Eff. : 36.68 lm/W $F_e = 1.5020$ W

Electrical parameters

V = 24.00 V I = 0.4383 A P = 10.52 W PF = 1.000 F=0.00 Hz

3000K

Spectrum

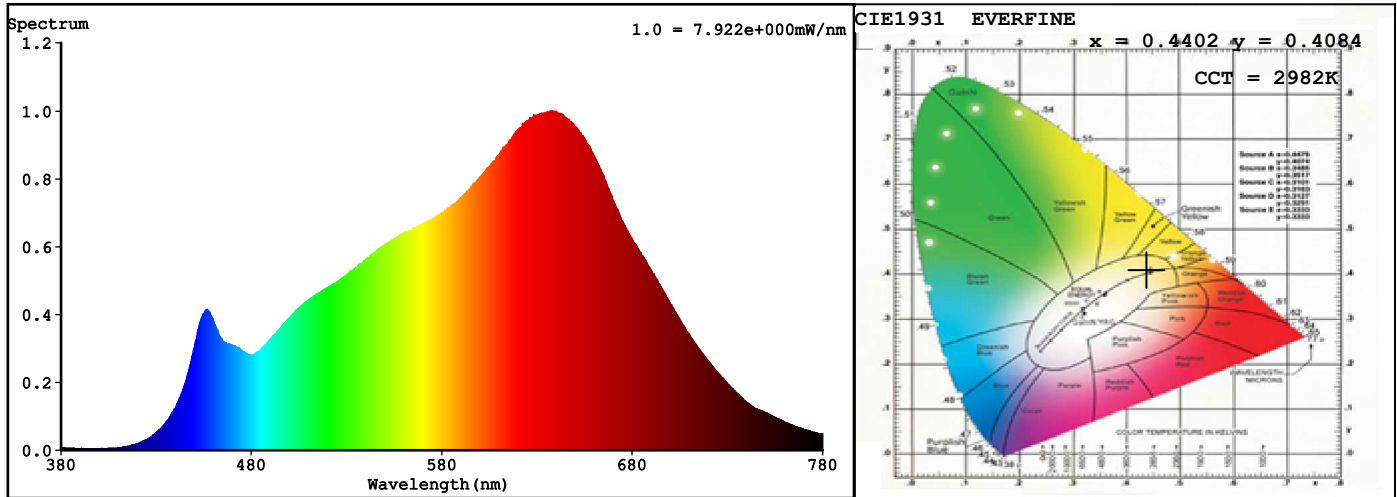

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4402$ $y = 0.4084$ / $u' = 0.2508$ $v' = 0.5236$ ($duv=1.29e-03$)

CCT= 2982K Prcp WL: $L_d=582.5nm$ Purity=54.7%

Peak WL: $L_p=638nm$ FWHM: =166.7nm Ratio:R=25.0% G=71.7% B=3.3%

Render Index: $R_a = 97.9$ TM30: $R_f=93$ $R_g=99$

R1 =99 R2 =99 R3 =99 R4 =98 R5 =98 R6 =98 R7 =97

R8 =96 R9 =92 R10=99 R11=99 R12=86 R13=99 R14=98 R15=97

LEVEL:OUT WHITE:ANSI_3000K

Photometric & Radiometric Parameters

Flux = 368.21 lm Eff. : 38.23 lm/W $F_e = 1.3867$ W

Electrical parameters

V = 24.00 V I = 0.4013 A P = 9.630 W PF = 1.000 F=0.00 Hz

3500K

Light efficiency:

n/a Lumen/Watt


Light quality:

CRI: 97.4

Color temperature:


3284 K

115.1°




Output: 309 Lumen Power consumption: 0.00


Spectral distribution

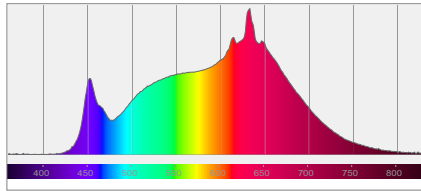


Color coordinates



White color point




CRI R values

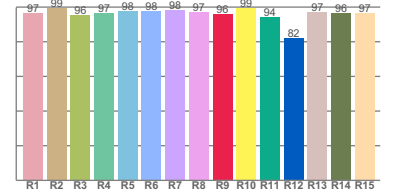

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3284 K	97.4	95.7	93.8	100.6	95.9	0.419	0.399	0.241	0.345	0.0009

Beam details

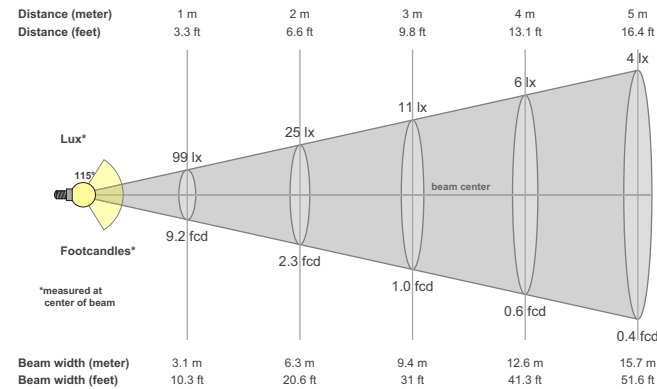

Beam angles

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
115.1°	170.3°	189.4°


Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
99.2 cd	73.2%	49.4%

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
99lx	25lx	11lx	6lx	4lx	3lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx	0lx	0lx	0lx	0lx	0lx	0lx
9.2fcd	2.3fcd	1fcd	0.6fcd	0.4fcd	0.3fcd	0.2fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd

Power scope

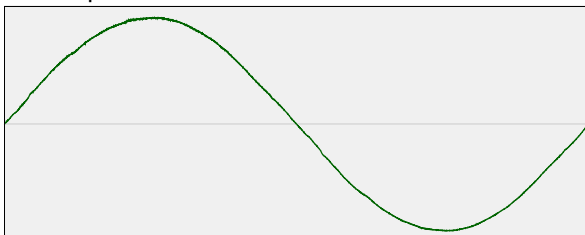


Power	Power factor	Power frequency
0.00 W	n/a	{FREQ} Hz

Nominal voltage	Voltage	Current
230 V	111 V	0.000 A

4100K

Spectrum

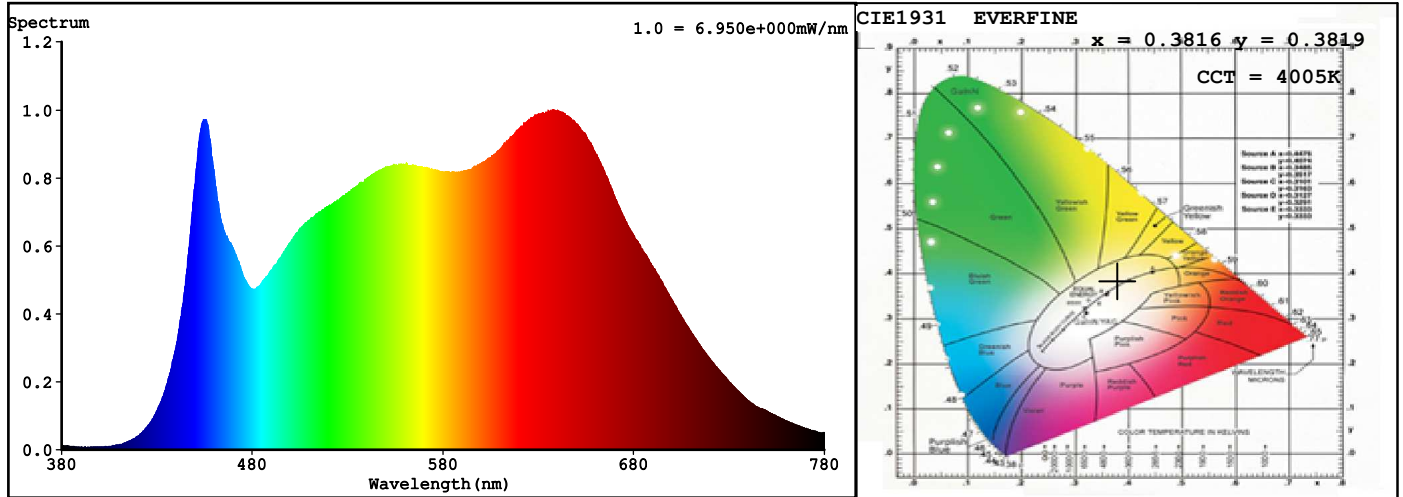

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.3816$ $y = 0.3819$ / $u' = 0.2238$ $v' = 0.5040$ ($duv=2.04e-03$)

CCT= 4005K Prcp WL: $Ld=578.0nm$ Purity=29.1%

Peak WL: $Lp=638nm$ FWHM: $=207.7nm$ Ratio:R=20.2% G=75.1% B=4.6%

Render Index: $Ra = 97.4$ TM30: $Rf=93$ $Rg=99$

R1 =99 R2 =99 R3 =97 R4 =96 R5 =97 R6 =97 R7 =97

R8 =97 R9 =99 R10=97 R11=98 R12=76 R13=99 R14=98 R15=97

LEVEL:OUT WHITE:ANSI_4000K

Photometric & Radiometric Parameters

Flux = 403.69 lm Eff. : 40.22 lm/W $Fe = 1.4903 W$

Electrical parameters

V = 24.00 V I = 0.4182 A P = 10.04 W PF = 1.000 F=0.00 Hz