

Light efficiency:

n/a Lumen/Watt

Light quality:

CRI: 94.9

Color temperature:

7560 K

Output: 351 lm/ft

Peak: 116 cd

Power: 0.00 W

PF: n/a

No photo

Product name:

VariTune RazorLine 6.1 TW 2700K-6500K 0-100


Item number:

AL-01-38-2401

Date and time:

7/15/2025 3:22:19 PM

Description:

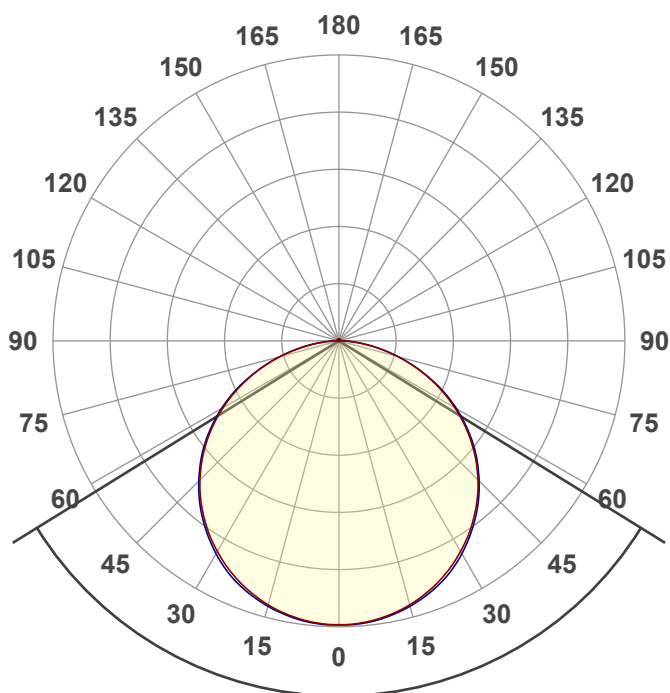


Beam angle

116.4°






CIE 1931
x: 0.300
y: 0.308

Spectra

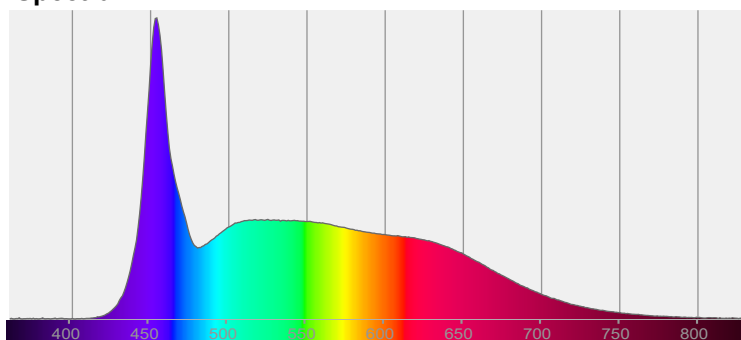


Power

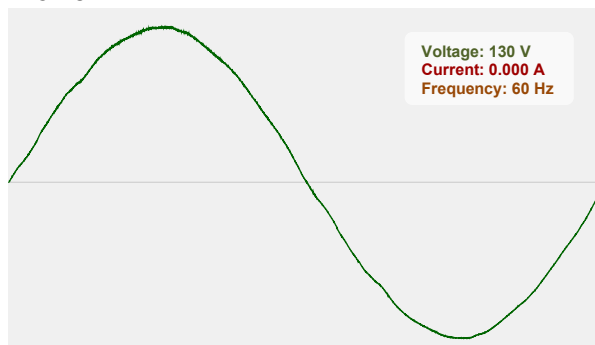


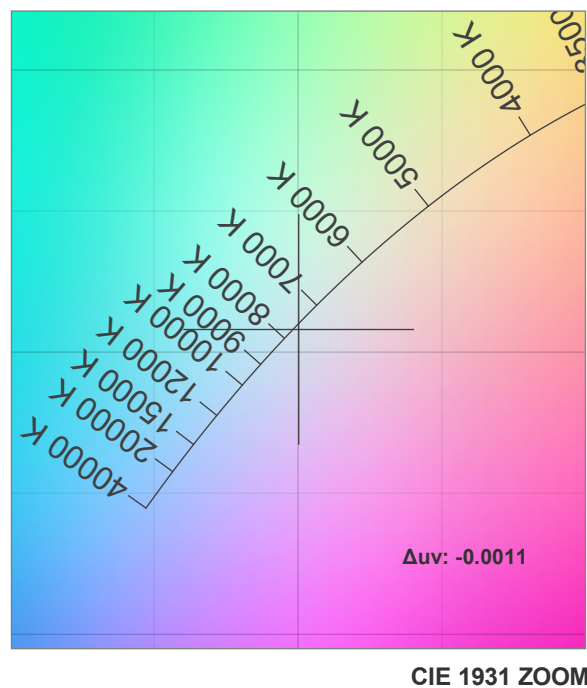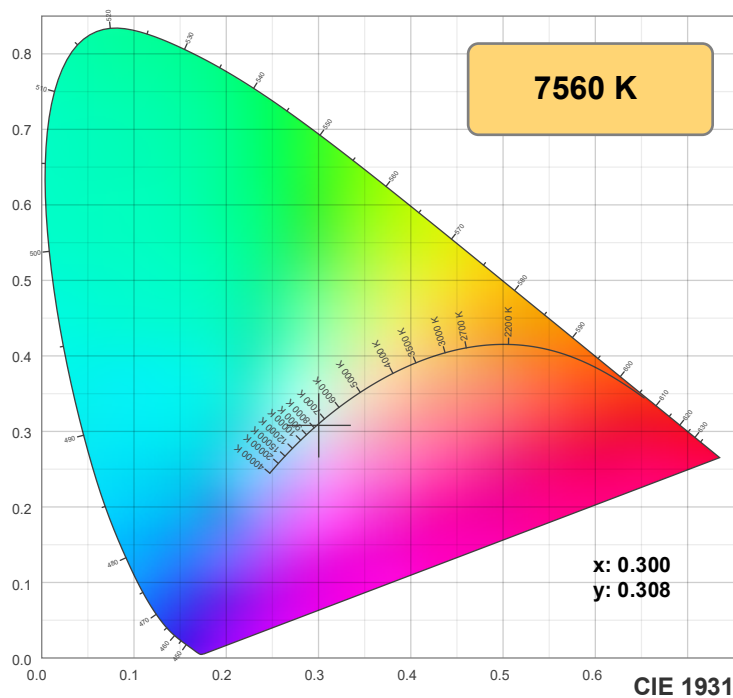

TM30: 89.0

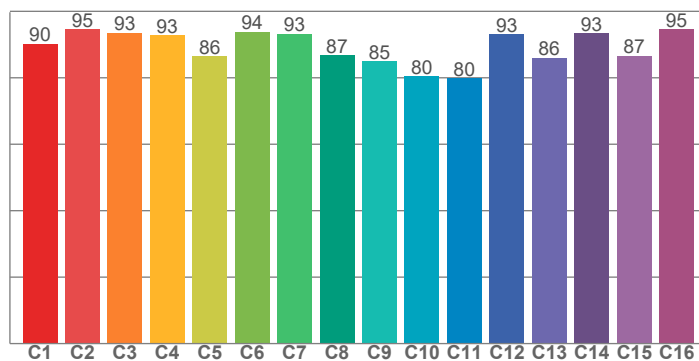

CRI: 94.9 (R1-R8)

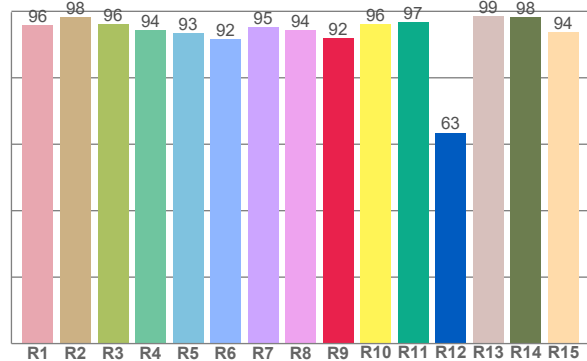

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
95.8	98.3	96.2	94.4	93.4	91.6	95.2	94.3	91.9	96.2	96.9	63.5	98.6	98.3	93.7


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
90.2	94.6	93.5	92.7	86.4	93.8	93.2	86.7	84.9	80.4	79.8	93.1	86.0	93.4	86.6	94.5

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
90.2	98.9	85.0	80.0	85.7	90.2	97.0	97.4	97.4	95.7	93.4	93.4	94.2	95.4	94.0

CQS: 90.9

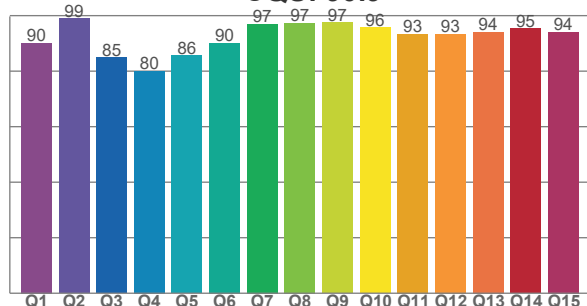

Color parameters

Color temperature	Color rendering Index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
7560 K	94.9	91.9	89.0	98.2	90.9	0.300	0.308	0.197	0.303	-0.0011







Rf 89.0


Fidelity index Rf

Rg 98.2

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	90	-2%	2%
2	95	-1%	3%
3	93	-1%	0%
4	93	-2%	0%
5	86	-7%	-2%
6	94	-4%	0%
7	93	-4%	2%
8	87	-4%	7%
9	85	-3%	13%
10	80	1%	14%
11	80	4%	9%
12	93	4%	1%
13	86	12%	0%
14	93	-1%	-3%
15	87	5%	-8%
16	95	-3%	2%

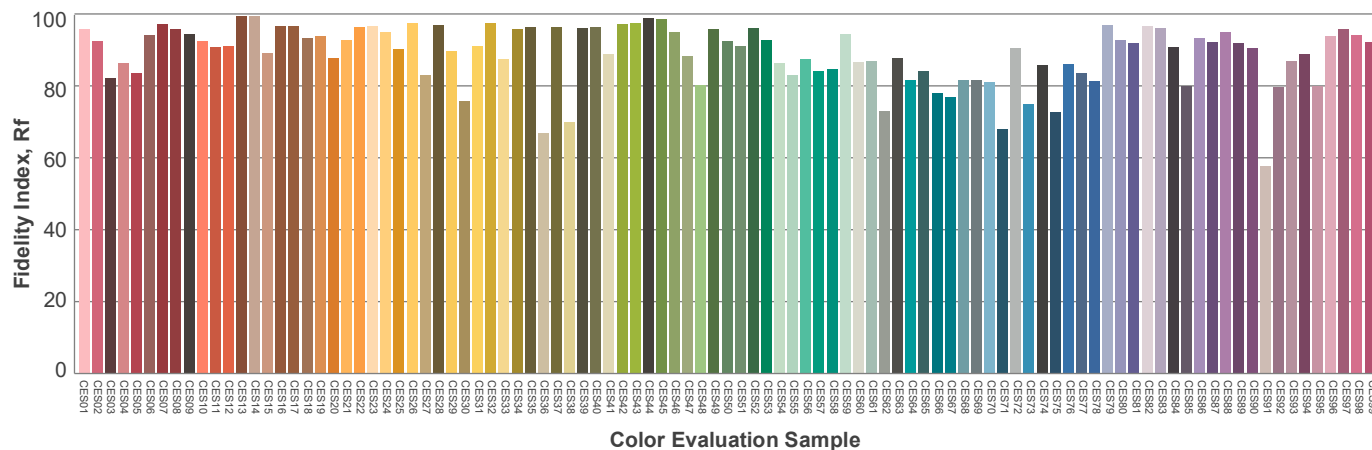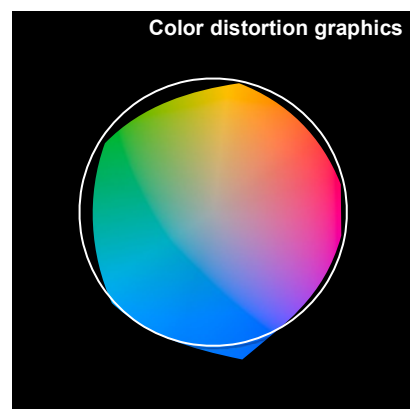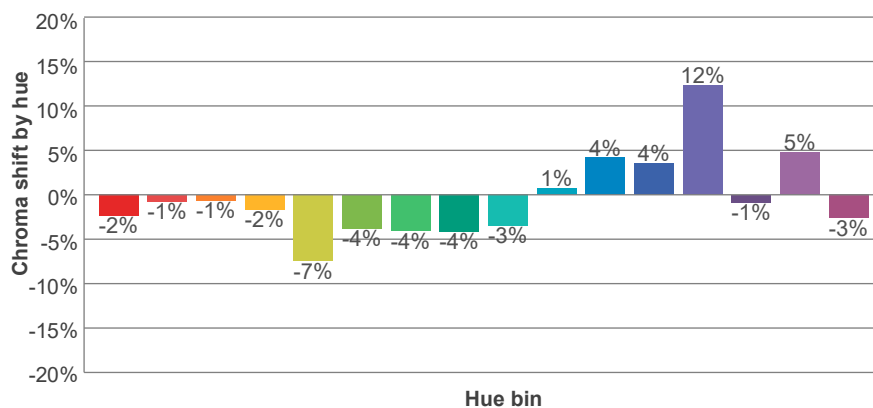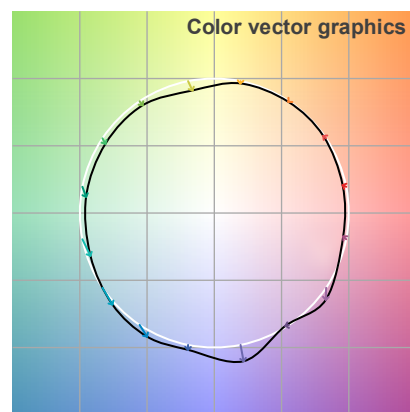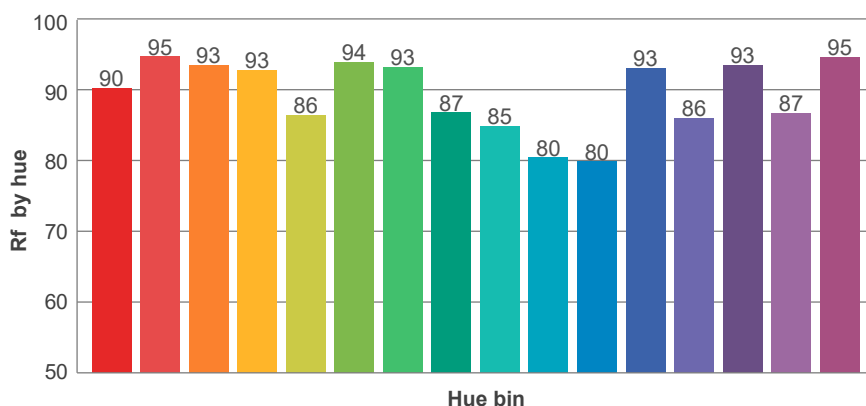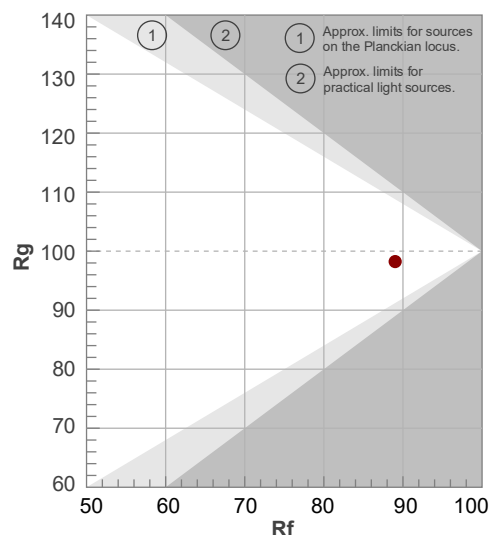

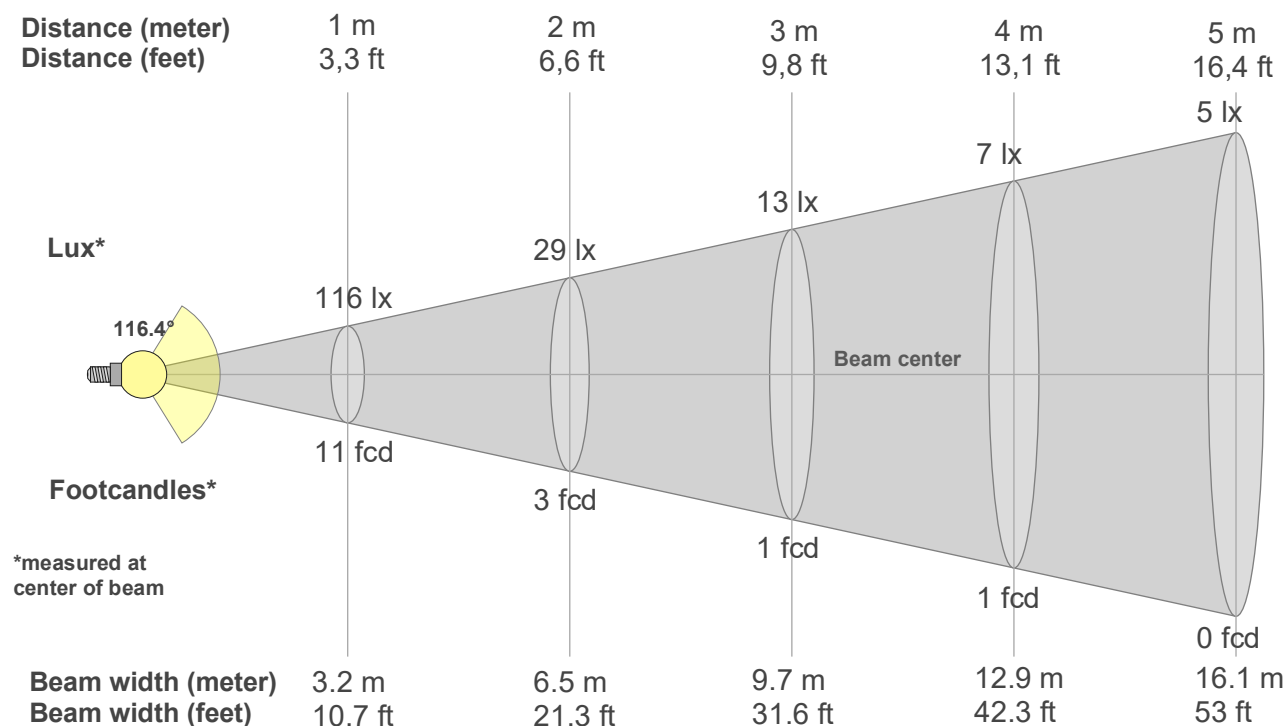

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
116lx	29lx	13lx	7lx	5lx	3lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx	1lx	0lx	0lx	0lx	0lx	0lx
10.8fcd	2.7fcd	1.2fcd	0.7fcd	0.4fcd	0.3fcd	0.2fcd	0.2fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
116	115	114	112	108	104	99	94	87	80	72	64	55	45	35	25	16	7	2	1
100%	100%	98%	96%	93%	90%	86%	81%	75%	69%	62%	55%	47%	39%	30%	22%	13%	6%	2%	1%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
116	116	114	112	109	105	100	94	88	81	73	65	55	46	35	25	15	7	1	0
100%	100%	99%	97%	94%	91%	87%	82%	76%	70%	63%	56%	48%	39%	30%	22%	13%	6%	1%	0%

Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
116	115	114	112	108	104	99	94	87	80	72	64	55	45	35	25	16	7	2	1
100%	100%	98%	96%	93%	90%	86%	81%	75%	69%	62%	55%	47%	39%	30%	22%	13%	6%	2%	1%

Intensities in 270° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
116	116	114	112	109	105	100	94	88	81	73	65	55	46	35	25	15	7	1	0
100%	100%	99%	97%	94%	91%	87%	82%	76%	70%	63%	56%	48%	39%	30%	22%	13%	6%	1%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
116.4°	164.4°	177.5°	76.4%	51.4%

iso-candela diagram

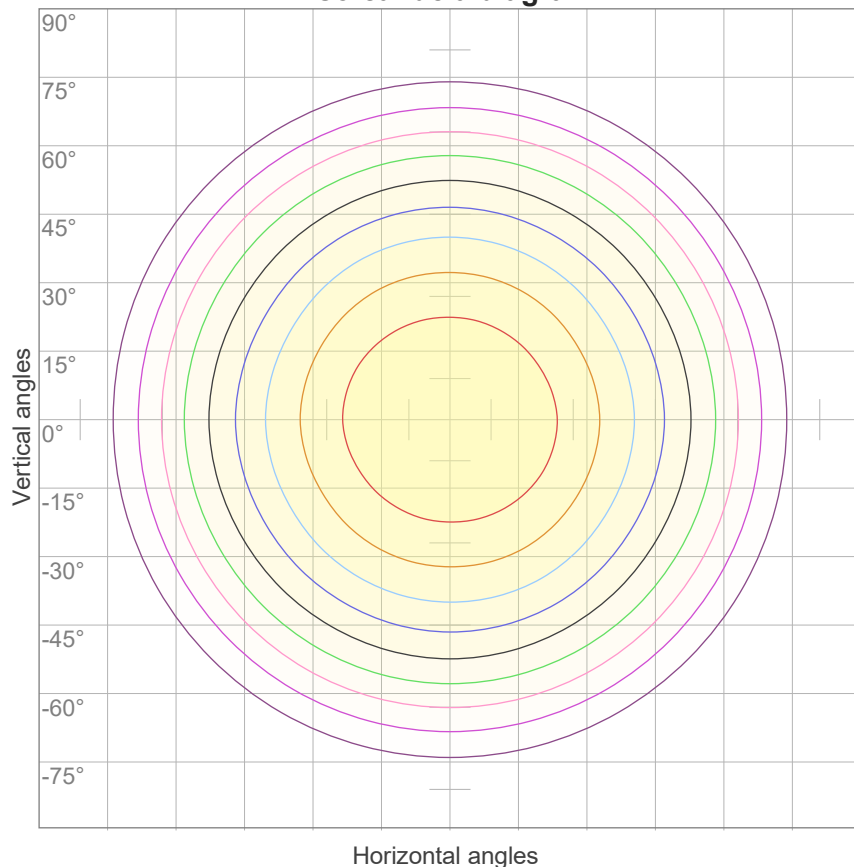

iso-lux diagram

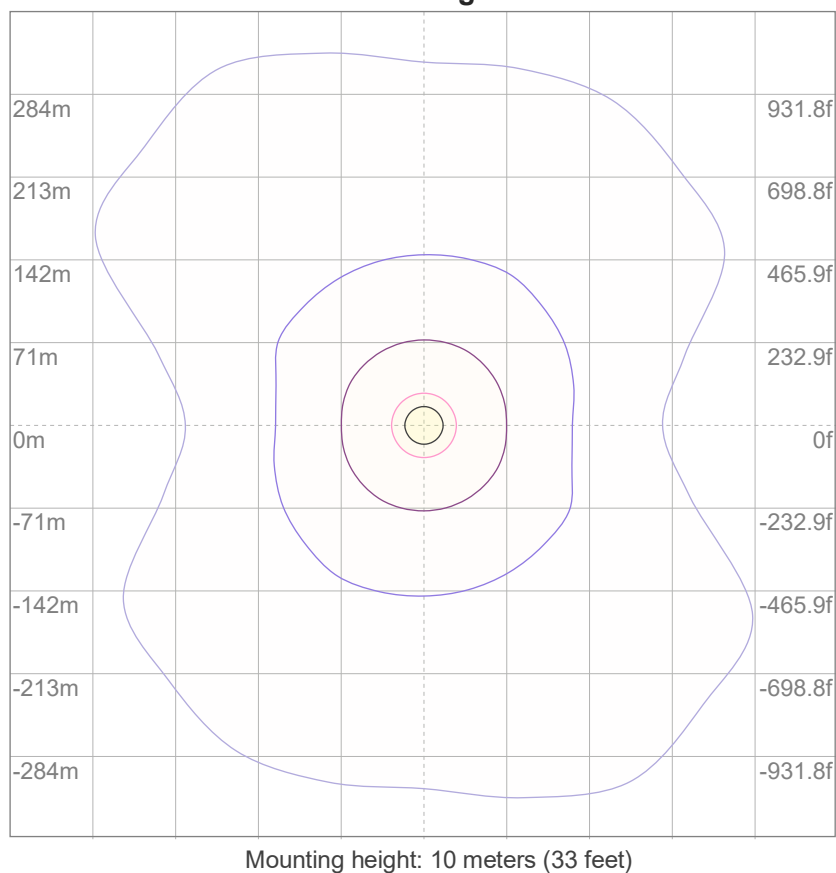

p Ceiling	70	70	50	50	30	70	70	50	50	30
p Walls	50	30	50	30	30	50	30	50	30	30
p Floor	20	20	20	20	20	20	20	20	20	20
Room size X Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
Variation of the observer position for the luminaire distance S										
n/a	n/a					n/a				
n/a	n/a					n/a				
n/a	n/a					n/a				
CIE 117-1995. Corrected glare indices referring to 351 lm total luminous flux										


Viso Systems Aps – Copenhagen, Denmark – www.visosystems.com

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	110	110	110	106	106	106	101	101	101	99
1	108	103	99	95	105	101	97	93	96	93	90	92	89	87	88	86	84	82
2	98	90	82	77	95	88	81	76	84	78	74	80	76	72	77	73	70	68
3	89	78	70	63	87	77	69	63	73	67	61	71	65	60	68	63	59	57
4	81	69	60	53	79	68	59	53	65	58	52	63	56	51	60	55	50	48
5	75	62	53	46	73	61	52	45	58	51	45	56	49	44	54	48	44	41
6	69	55	46	40	67	54	46	40	53	45	39	51	44	39	49	43	38	36
7	64	50	41	35	62	49	41	35	48	40	35	46	39	34	45	39	34	32
8	59	46	37	31	58	45	37	31	44	36	31	42	35	31	41	35	30	28
9	56	42	34	28	54	41	33	28	40	33	28	39	32	28	38	32	27	25
10	52	39	31	25	51	38	30	25	37	30	25	36	30	25	35	29	25	23

LAMPS (number of lamps)

Luminaire budgetary diagram

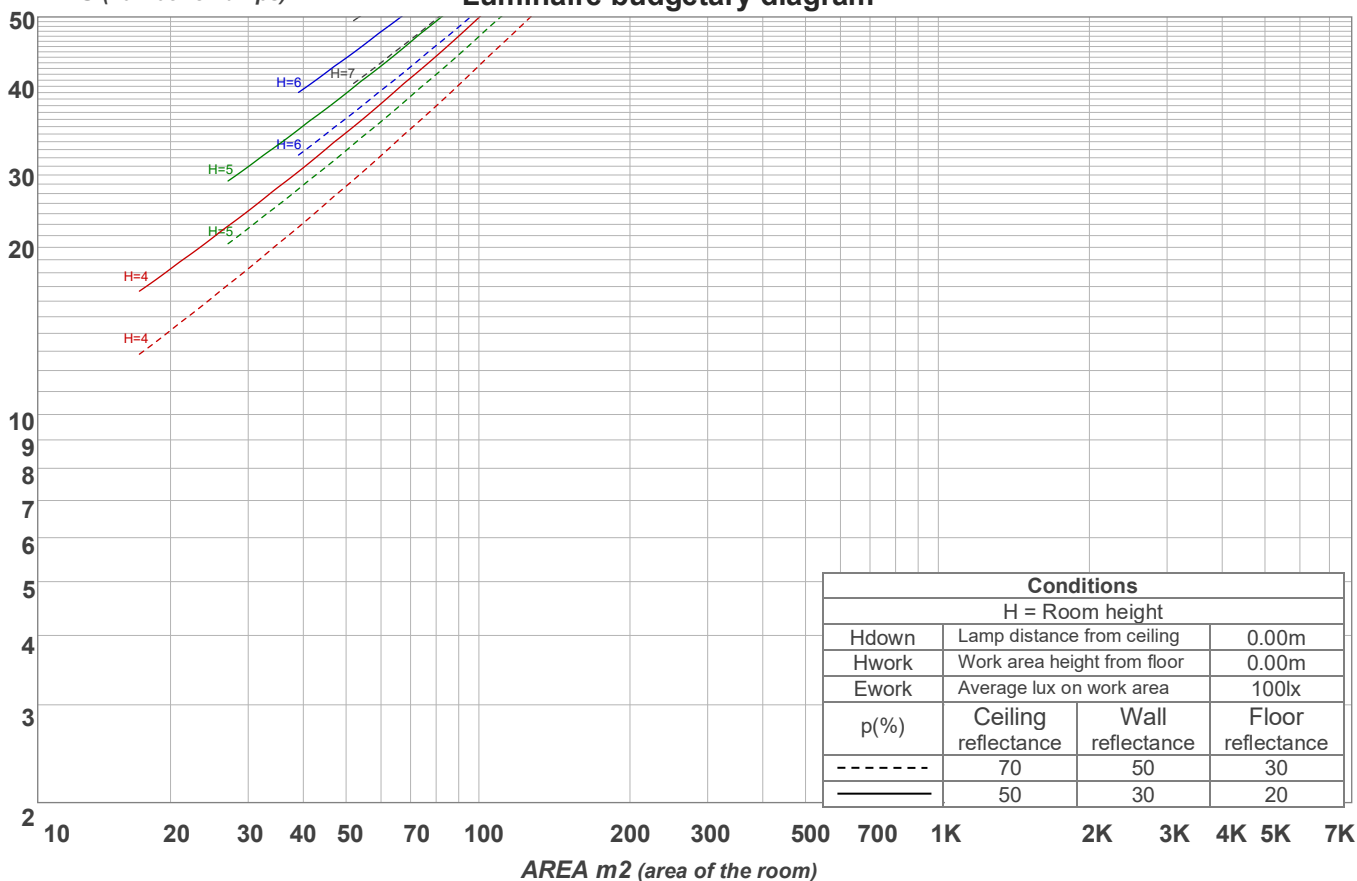


Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
{LUM0-10}	31.6 lm	48.2 lm	58.8 lm	61.9 lm	57.0 lm	44.5 lm	26.4 lm	8.28 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0.986 lm	0.519 lm	0.505 lm	0.486 lm	0.441 lm	0.392 lm	0.300 lm	0.191 lm	0.065 lm


LCS table

BUG rating:	B0 U1 G0	
Forward light	Lumens	Lumens %
Low(0-30):	45.4	12.9%
Medium(30-60):	88.8	25.3%
High(60-80):	35.4	10.1%
Very high(80-90):	4.2	1.2%
Back light		
Low(0-30):	45.4	12.9%
Medium(30-60):	88.8	25.3%
High(60-80):	35.4	10.1%
Very high(80-90):	4.2	1.2%
Uplight		
Low(90-100):	1	0.3%
High(100-180):	2.9	0.8%

LCS graph

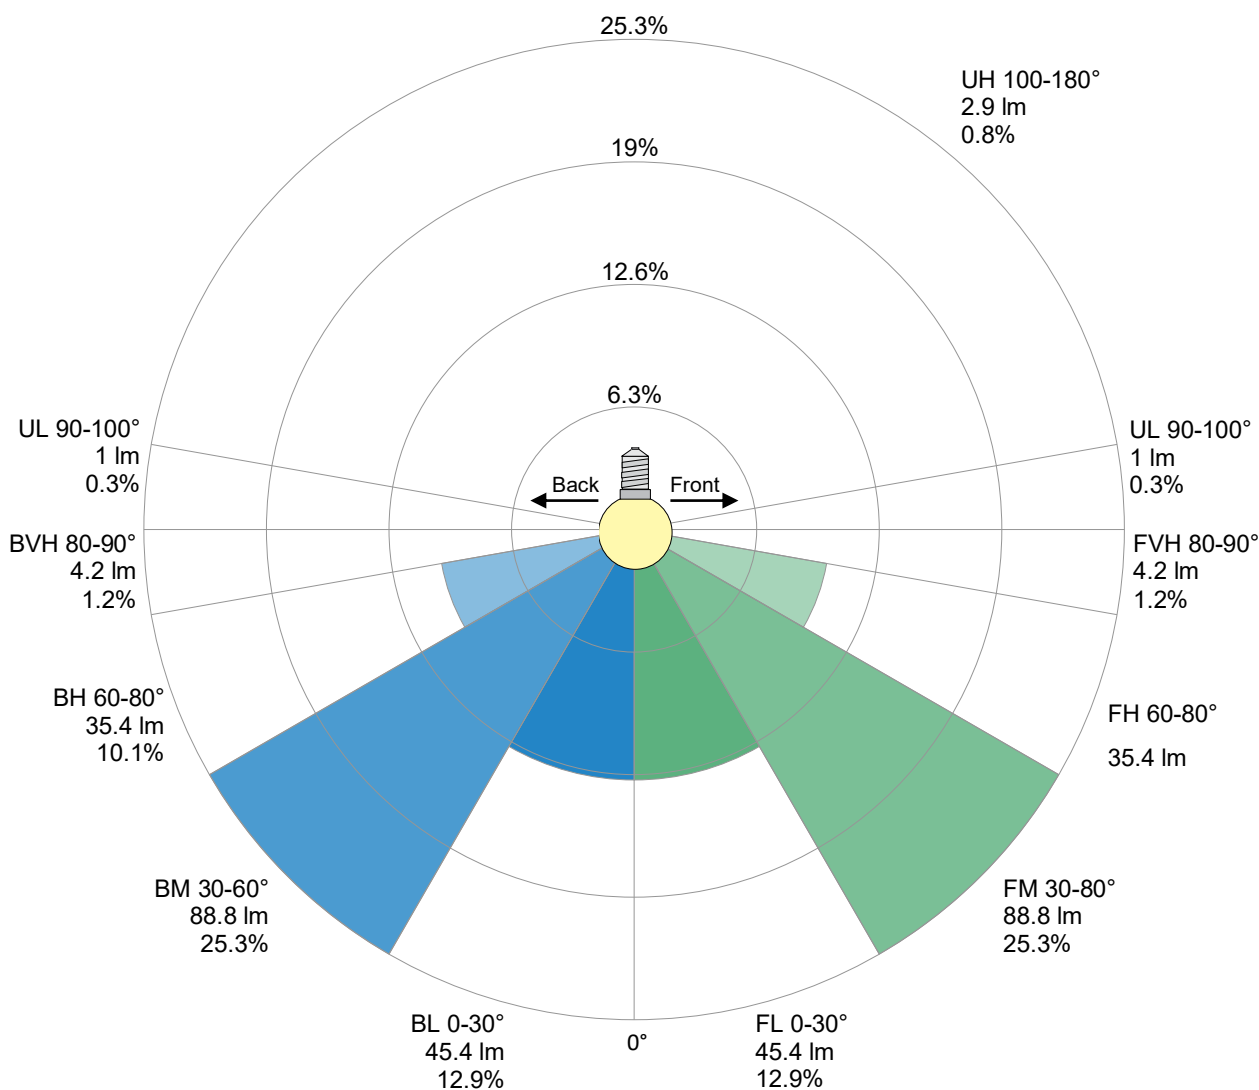

Warmup curve

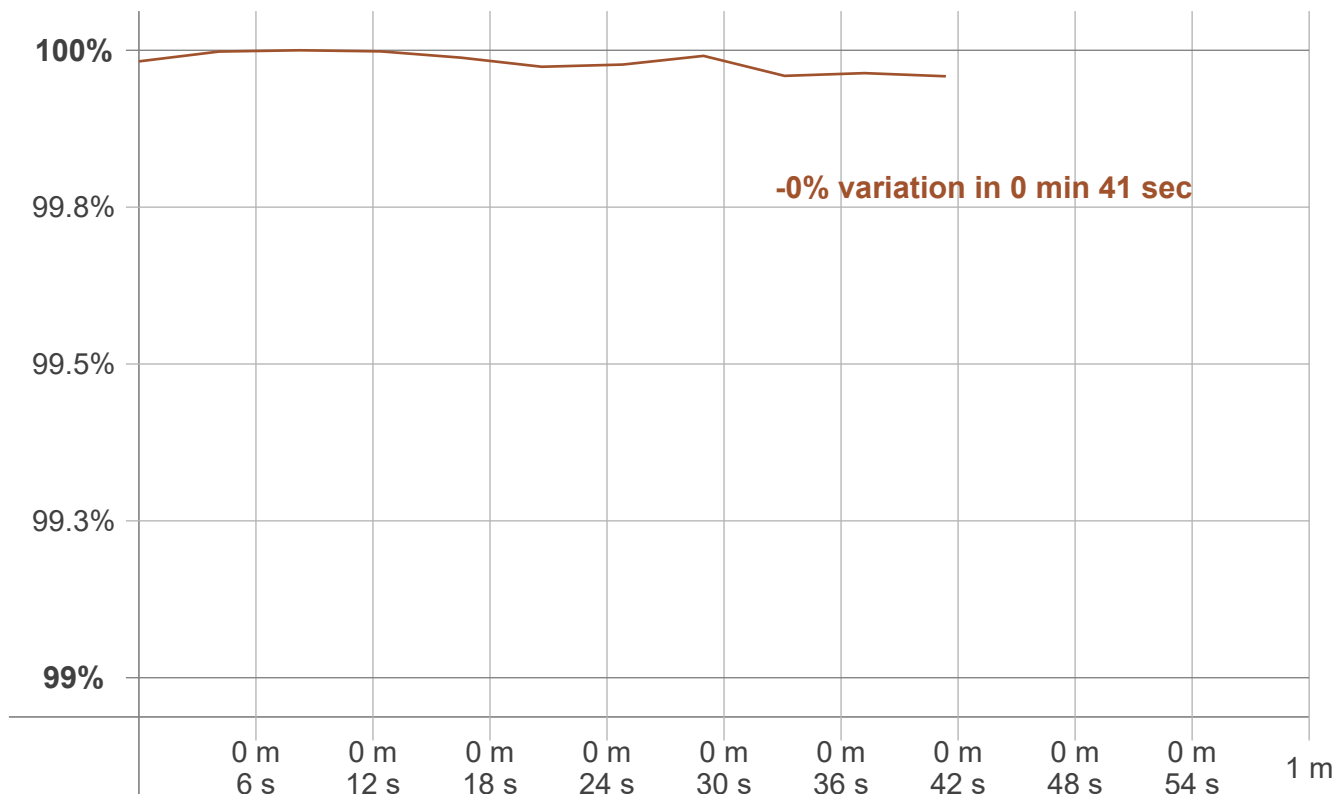

Warmup result

Warmup time:	Not completed
Warmup variation	0.0%

Warmup conditions

Stable period:	15 min
Stable change max:	2.0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
7551 K	+9 K	7560 K


Output change

Output start	Output change	Output end
351 lm	lm	351 lm


Flicker curve (complete sampled flicker signal)



Flicker frame (frame of one flicker period)

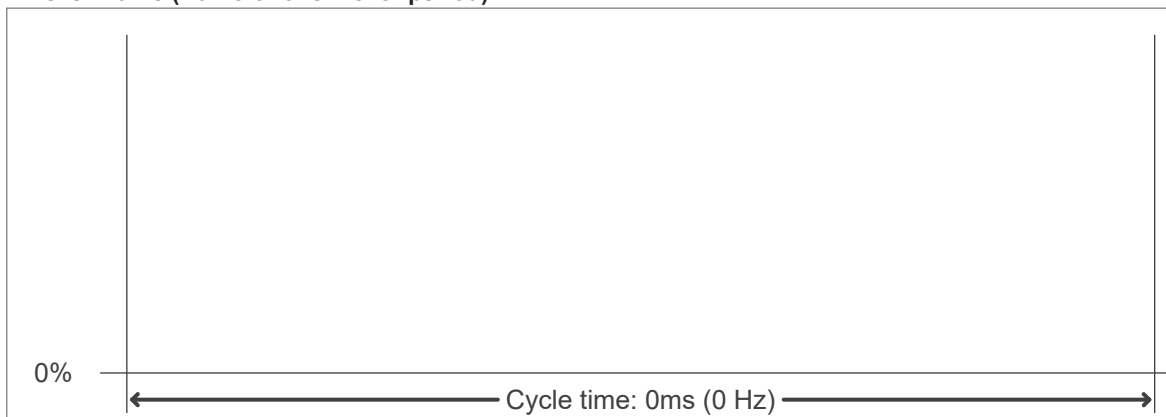

Flicker FFT (frequency scope of flicker curve)

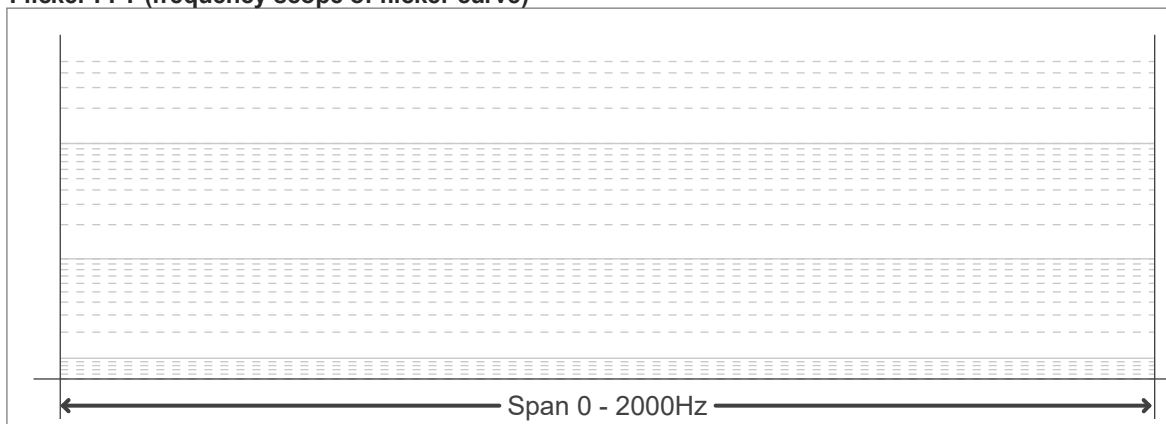

Flicker results:

Flicker frequency:		n/a Hz	
Flicker index:	n/a	JA8/10 40Hz	n/a %
Flicker percentage:	n/a %	JA8/10 90Hz	n/a %
SVM: (Visual flicker)	n/a	JA8/10 200Hz	n/a %
PstLM	n/a	JA8/10 400Hz	n/a %
Mp	n/a	JA8/10 1000Hz	n/a %

Flicker conditions:

Sample rate:	n/a samples/second
--------------	--------------------