
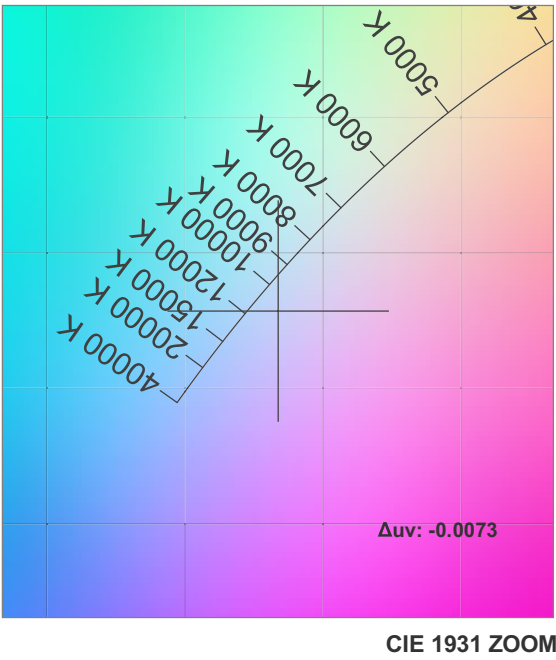



Radialux™ 5.5 COB RGBTW LED Tape Light

RGBTW - RGB, COOL WHITE & WARM WHITE


Note: Specifications are representative of the diode type and not a particular tape light article.

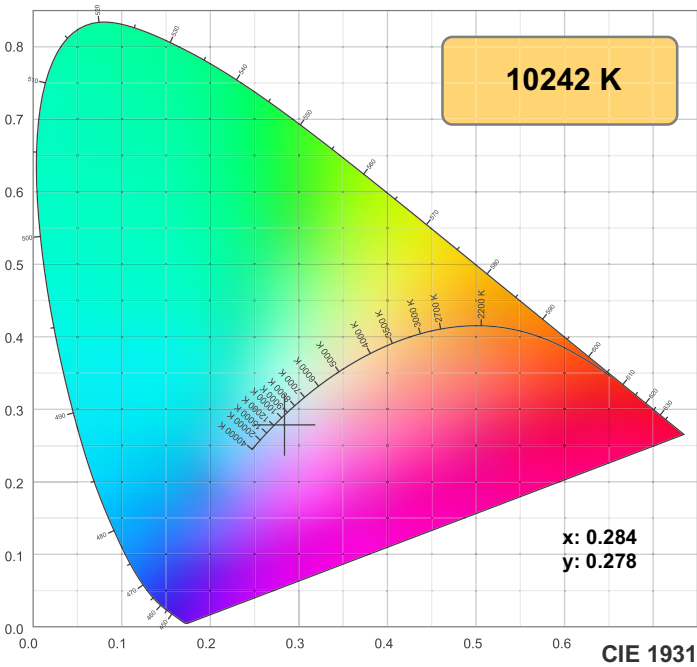

TM-30: 78.1

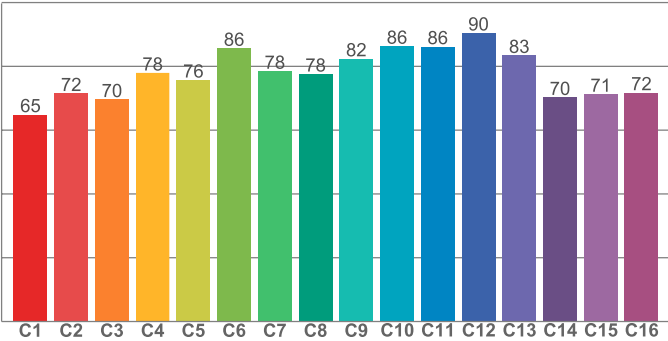

CRI: 71.7 (R1-R8)

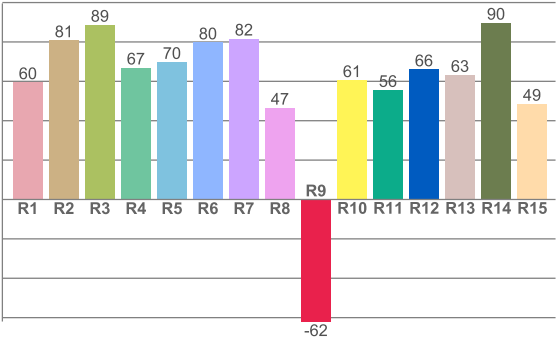

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
59.5	80.8	88.7	67.0	69.8	79.7	81.7	46.6	-62.0	60.6	55.6	66.1	63.2	89.7	48.6


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
64.9	71.5	69.6	77.9	75.7	85.7	78.5	77.6	82.4	86.3	86.2	90.5	83.5	70.3	71.3	71.8

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
78.8	95.1	96.5	95.7	97.0	96.6	88.3	83.3	88.6	88.6	76.4	73.0	78.3	85.3	77.1

CQS: 84.3

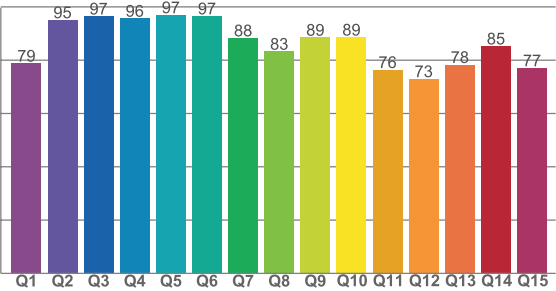

Color parameters







Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
10242 K	71.7	-62.0	78.1	106.9	84.3	0.284	0.278	0.197	0.289	-0.0073

Note: Specifications are representative of the diode type and not a particular tape light article.


Rf 78.1
Fidelity index Rf

Rg 106.9
Gamut index Rg

Hue Bin	Rf	Shifts (%)	
		Chroma	Hue
1	65	19%	4%
2	72	14%	-7%
3	70	7%	-18%
4	78	-1%	-13%
5	76	-14%	-7%
6	86	-2%	7%
7	78	-6%	9%
8	78	7%	12%
9	82	8%	10%
10	86	7%	7%
11	86	6%	2%
12	90	-2%	0%
13	83	0%	8%
14	70	-1%	18%
15	71	18%	18%
16	72	9%	11%

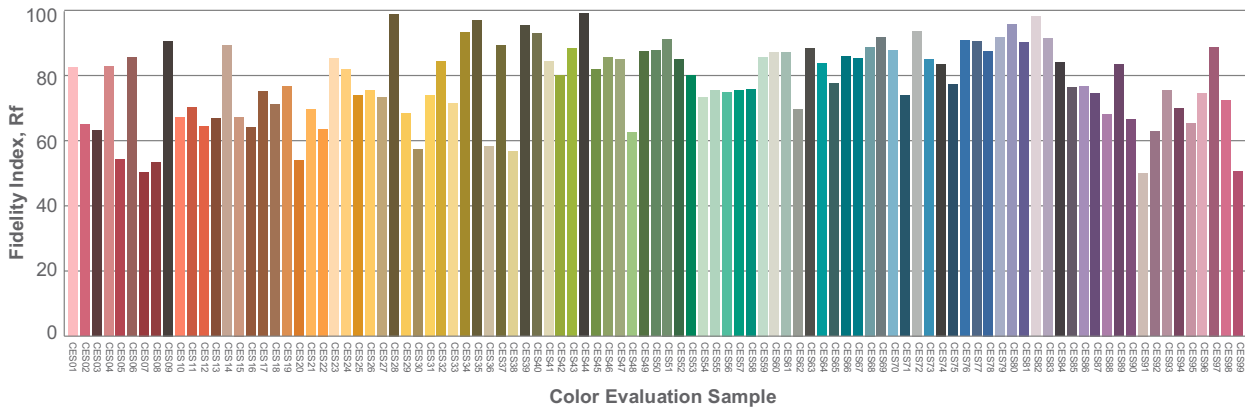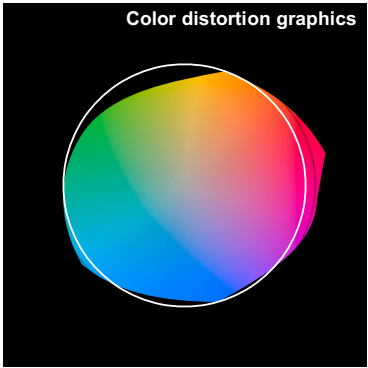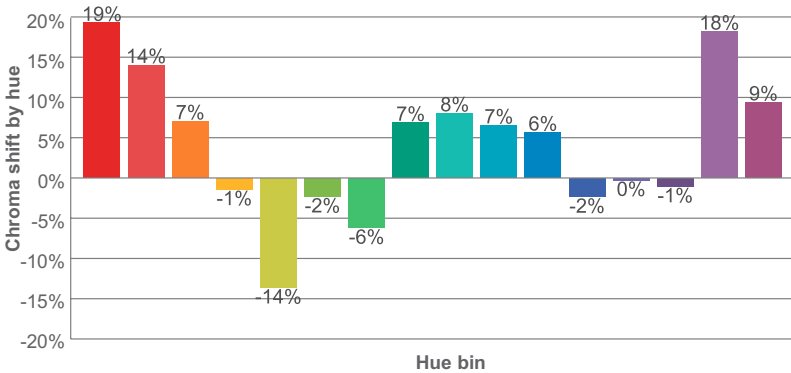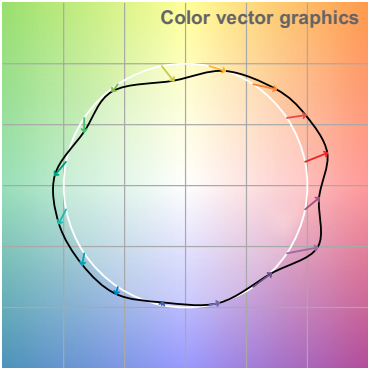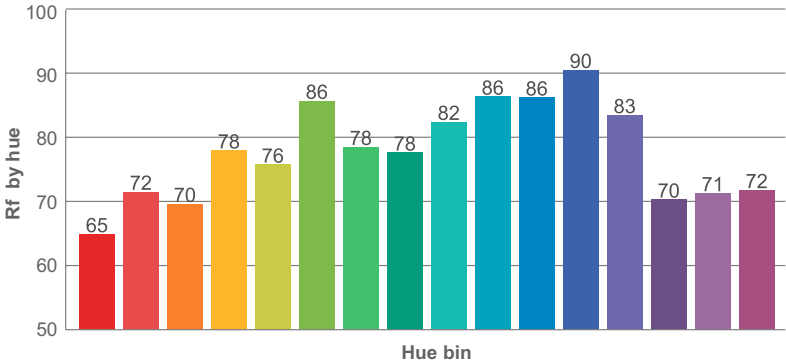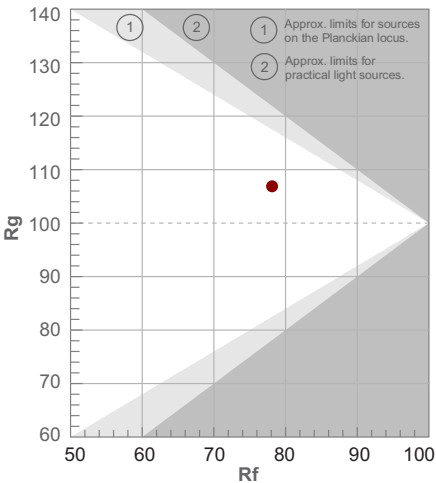

Note: Specifications are representative of the diode type and not a particular tape light article.

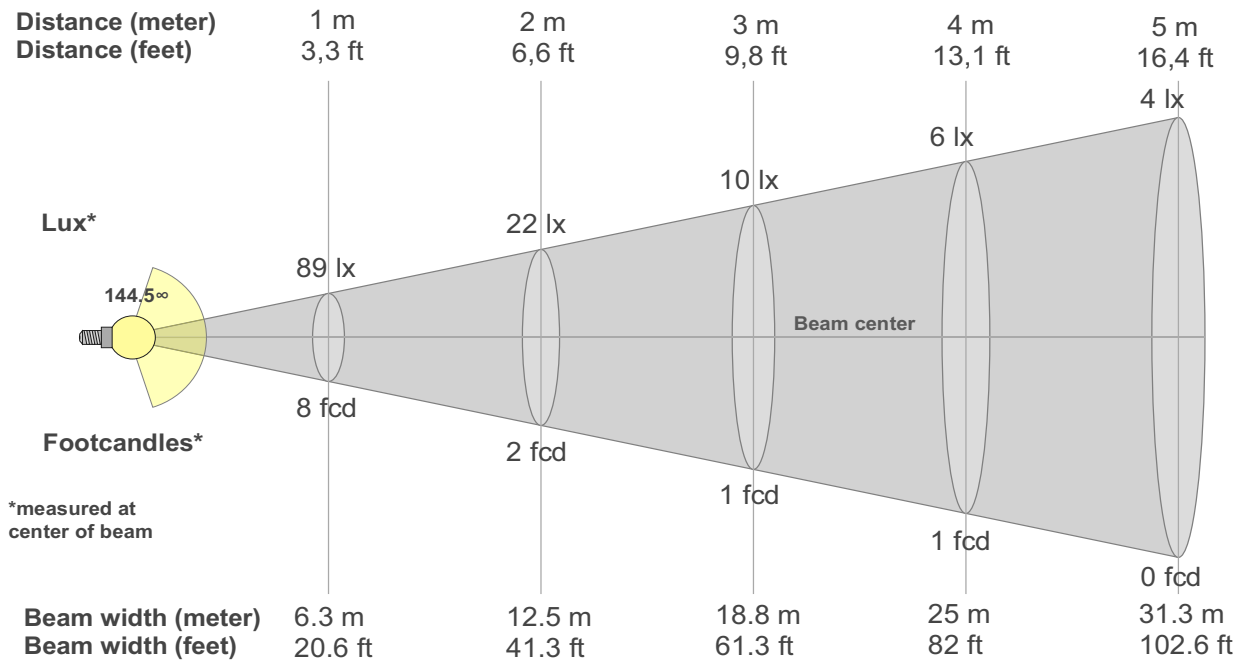

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
89lx	22lx	10lx	6lx	4lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx
8.2fcd	2.1fcd	0.9fcd	0.5fcd	0.3fcd	0.2fcd	0.2fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd

Intensities in 0°c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
88.6	88.2	86.5	83.5	79.2	73.9	67.8	61.9	56.4	50.4	39.2	7.7	0.6	0.5	0.4	0.4	0.4	0.4	0.5	0.5
100%	100%	98%	94%	89%	83%	77%	70%	64%	57%	44%	9%	1%	1%	1%	0%	0%	1%	1%	1%

Intensities in 90°c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
88.6	87.3	83.8	78.1	70.3	60.5	49.2	36.4	22.7	9.8	1.2	0.4	0.3	0.3	0.4	0.4	0.4	0.4	0.5	0.5
100%	99%	95%	88%	79%	68%	56%	41%	26%	11%	1%	0%	0%	0%	0%	0%	0%	0%	1%	1%

Intensities in 180°c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
88.6	88.2	86.5	83.5	79.2	73.9	67.8	61.9	56.4	50.4	39.2	7.7	0.6	0.5	0.4	0.4	0.4	0.4	0.5	0.5
100%	100%	98%	94%	89%	83%	77%	70%	64%	57%	44%	9%	1%	1%	1%	0%	0%	1%	1%	1%



Intensities in 270°c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
88.6	87.3	83.8	78.1	70.3	60.5	49.2	36.4	22.7	9.8	1.2	0.4	0.3	0.3	0.4	0.4	0.4	0.4	0.5	0.5
100%	99%	95%	88%	79%	68%	56%	41%	26%	11%	1%	0%	0%	0%	0%	0%	0%	0%	1%	1%


Beam angle 50°	Field angle 10°	Cutoff angle 2,5°	Intensity ratio in 120°cone	Intensity ratio in 90°cone
144.5°	187.3°	194.9°	61.9%	40.0%

Note: Specifications are representative of the diode type and not a particular tape light article.


RGBTW - 6500K COOL WHITE ONLY

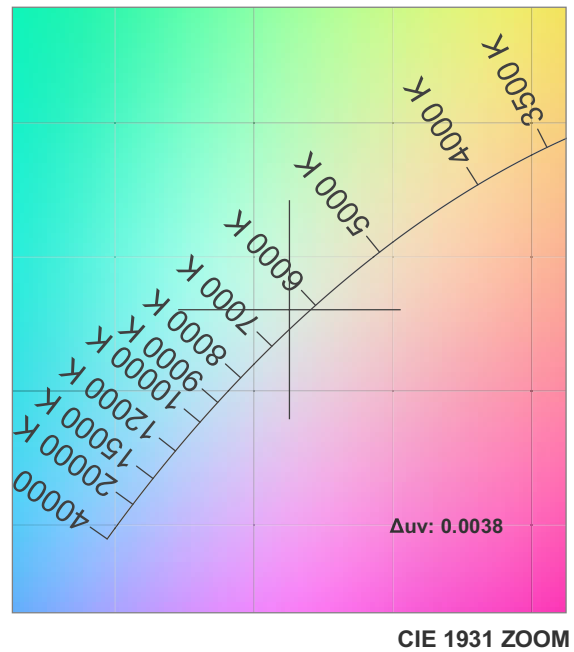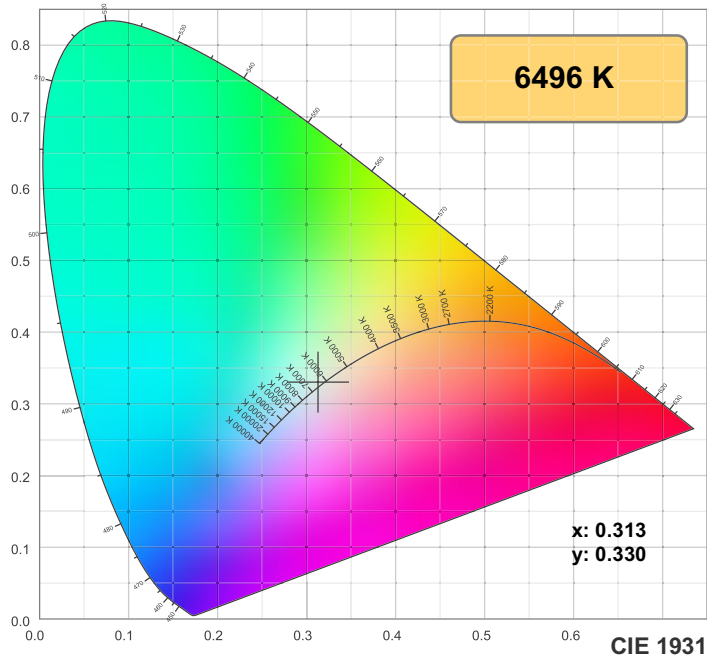

TM-30: 91.9

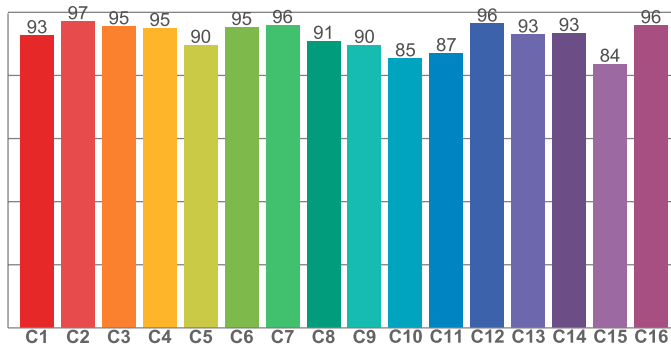

CRI: 96.3 (R1-R8)

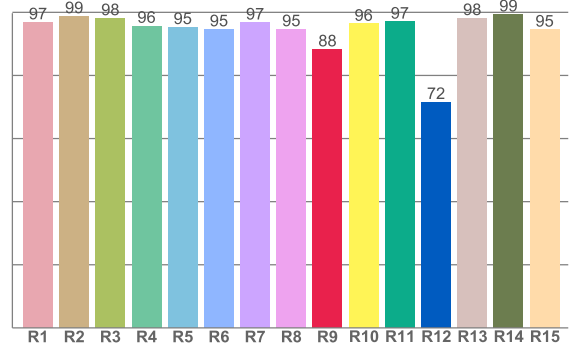

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
96.8	98.7	98.1	95.7	95.3	94.6	96.7	94.6	88.2	96.4	97.0	71.5	98.2	99.3	94.5


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92.6	97.1	95.5	94.9	89.6	95.3	95.9	90.8	89.6	85.3	87.0	96.3	92.9	93.3	83.6	95.8

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
92.1	98.7	89.8	87.9	92.0	94.4	97.5	97.8	99.5	98.5	97.9	98.0	97.9	96.4	95.3

CQS: 94.4

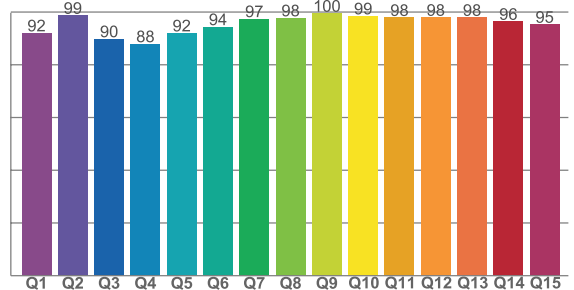

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
6496 K	96.3	88.2	91.9	98.6	94.4	0.313	0.330	0.197	0.313	0.0038

Note: Specifications are representative of the diode type and not a particular tape light article.







Rf 91.9

Fidelity index Rf


Rg 98.6

Gamut index Rg

Hue Bin	Rf	Shifts (%)	
		Chroma	Hue
1	93	-2%	0%
2	97	-1%	1%
3	95	-1%	0%
4	95	-2%	-1%
5	90	-7%	-2%
6	95	-3%	0%
7	96	-3%	1%
8	91	-3%	4%
9	90	-2%	9%
10	85	0%	9%
11	87	4%	8%
12	96	2%	0%
13	93	4%	-3%
14	93	1%	-3%
15	84	8%	-11%
16	96	-2%	0%

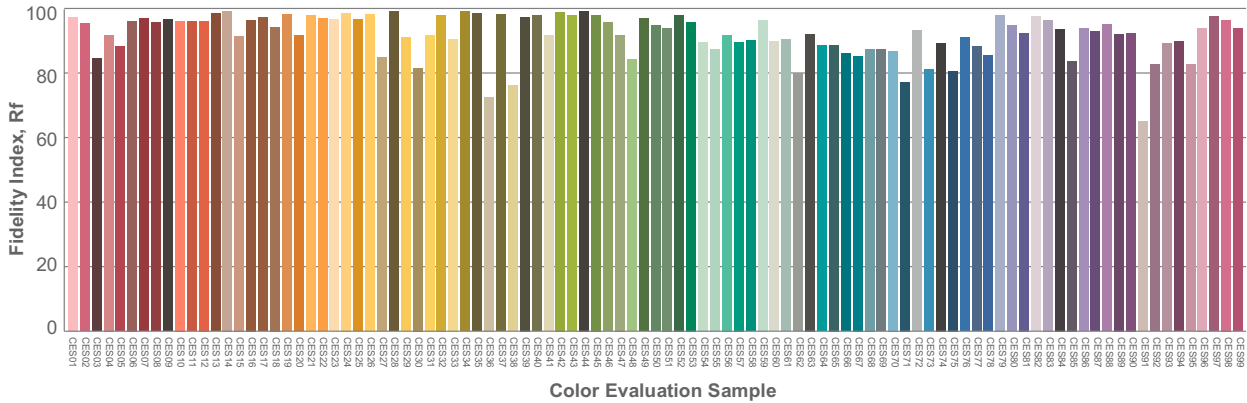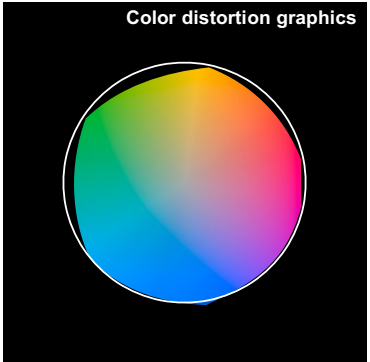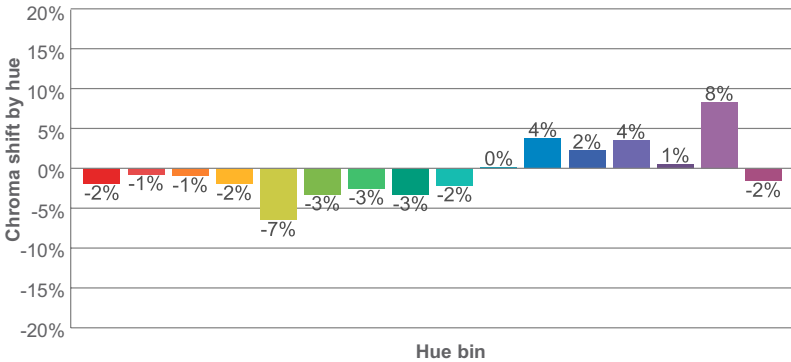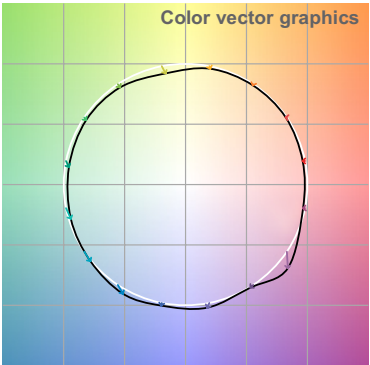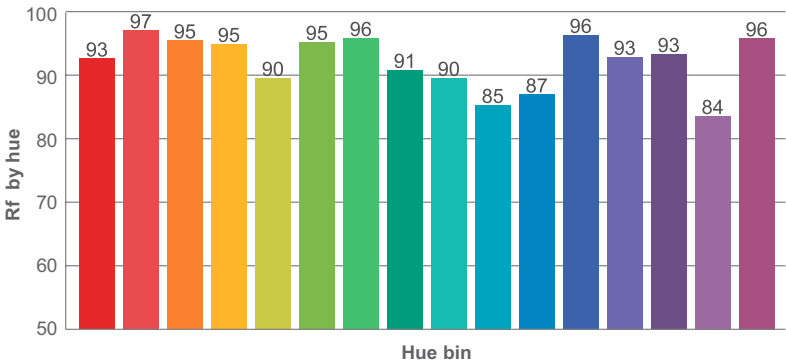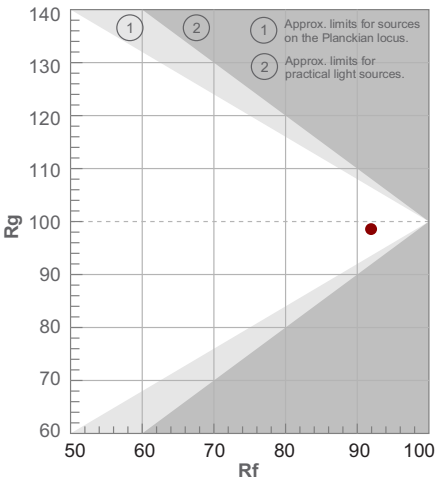

Note: Specifications are representative of the diode type and not a particular tape light article.

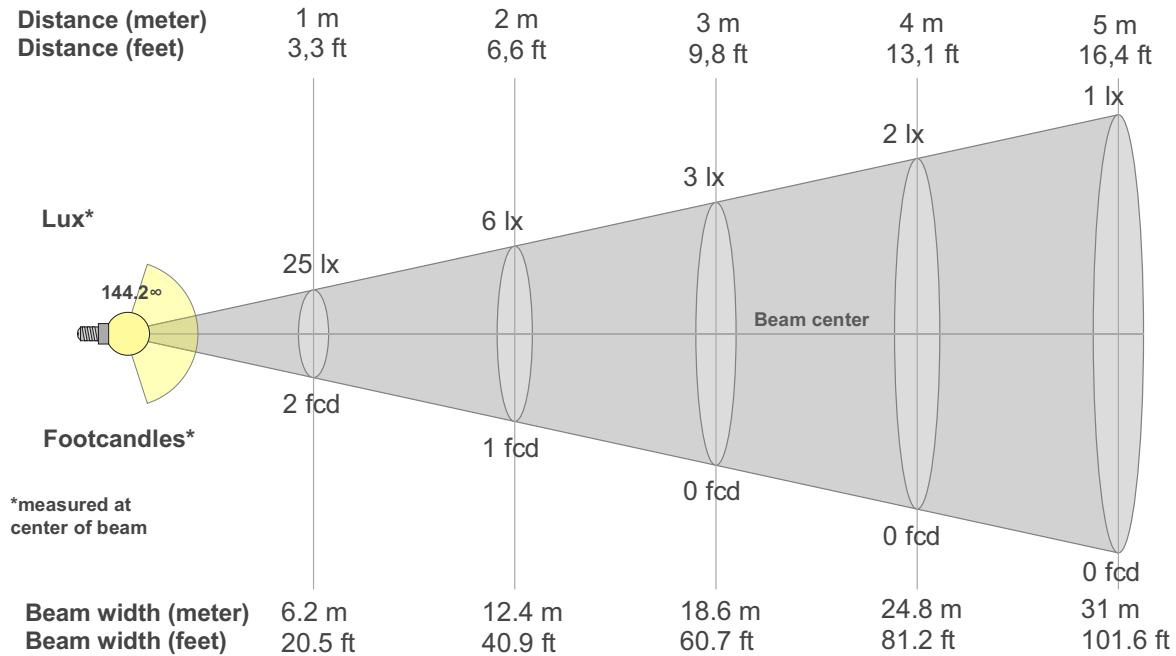

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
25lx	6lx	3lx	2lx	1lx	1lx	1lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx
2.3fcd	0.6fcd	0.3fcd	0.1fcd	0.1fcd	0.1fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd

Intensities in 0°c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
24.7	24.6	24.1	23.3	22.1	20.6	18.9	17.2	15.7	14.1	11.1	2.1	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1
100%	99%	98%	94%	89%	83%	76%	70%	63%	57%	45%	8%	1%	1%	0%	0%	0%	1%	1%	1%

Intensities in 90°c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
24.7	24.6	23.6	21.9	19.7	16.9	13.7	10.1	6.3	2.6	0.4	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
100%	99%	95%	89%	80%	68%	55%	41%	25%	11%	1%	0%	0%	0%	0%	0%	0%	0%	0%	1%

Intensities in 180°c-plane



0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
24.7	24.6	24.1	23.3	22.1	20.6	18.9	17.2	15.7	14.1	11.1	2.1	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1
100%	99%	98%	94%	89%	83%	76%	70%	63%	57%	45%	8%	1%	1%	0%	0%	0%	1%	1%	1%

Intensities in 270°c-plane


0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
24.7	24.6	23.6	21.9	19.7	16.9	13.7	10.1	6.3	2.6	0.4	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
100%	99%	95%	89%	80%	68%	55%	41%	25%	11%	1%	0%	0%	0%	0%	0%	0%	0%	0%	1%

Beam angle 50°	Field angle 10°	Cutoff angle 2,5%	Intensity ratio in 120°cone	Intensity ratio in 90°cone
144.2°	187.1°	194.4°	62.0%	40.1%


RGBTW - 2700K WARM WHITE ONLY

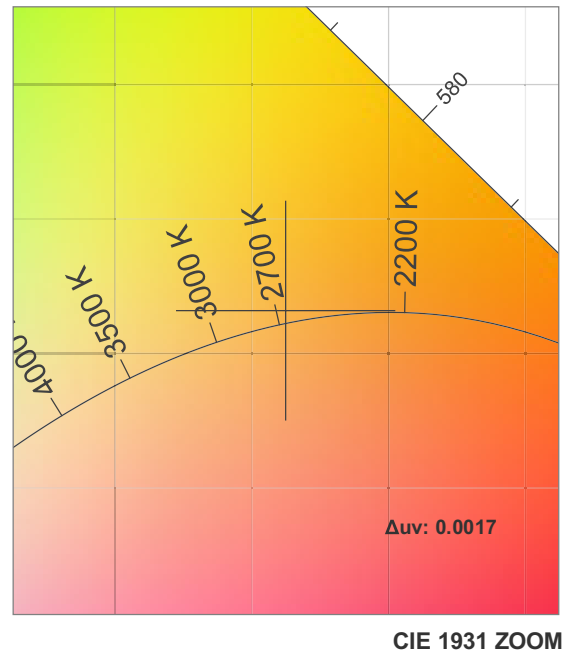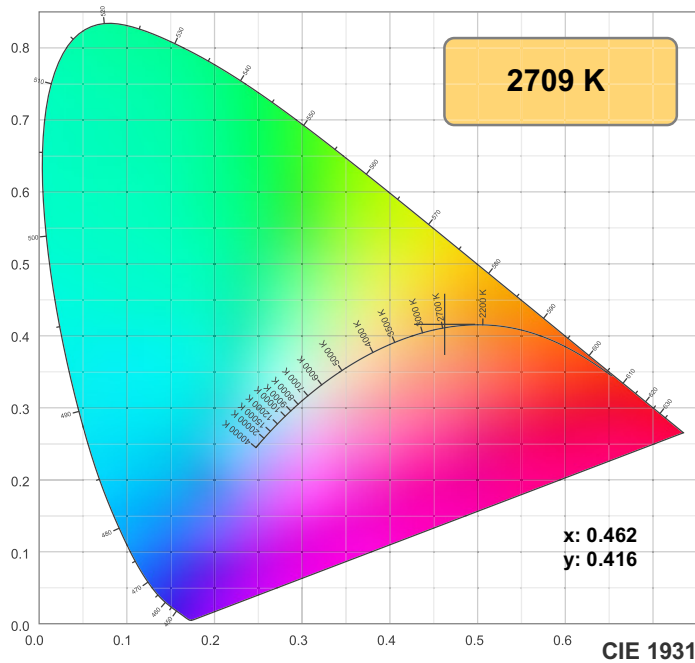


TM-30: 89.9

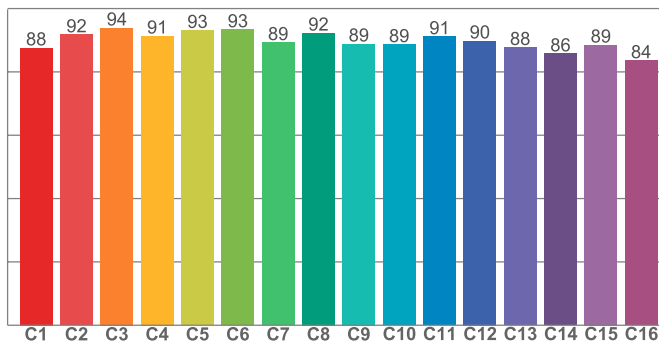

CRI: 92.1 (R1-R8)

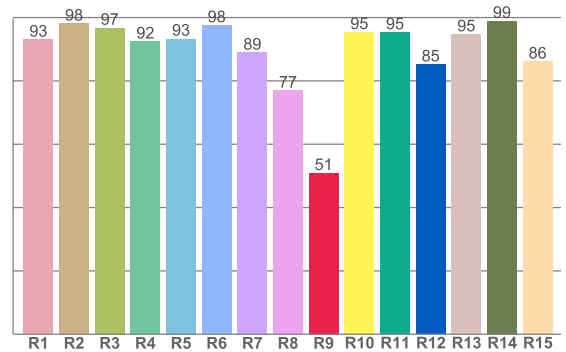

CQS: 89.9

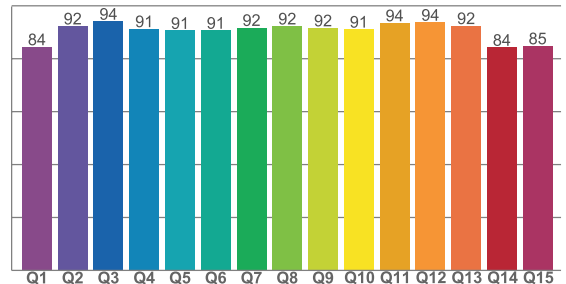

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
93.0	98.1	96.7	92.4	93.3	97.6	88.9	76.9	50.9	95.4	95.3	85.2	94.7	98.9	86.1

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
87.6	91.7	93.9	91.4	93.1	93.3	89.3	92.3	88.9	88.6	91.1	89.8	87.7	85.7	88.5	83.6

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
84.5	92.3	94.1	91.3	90.6	90.7	91.8	92.3	91.6	91.1	93.5	93.7	92.5	84.3	84.8

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2709 K	92.1	50.9	89.9	95.0	89.9	0.462	0.416	0.262	0.353	0.0017

Note: Specifications are representative of the diode type and not a particular tape light article.







Rf 89.9

Fidelity index Rf


Rg 95.0

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	88	-6%	2%
2	92	-4%	2%
3	94	-3%	2%
4	91	-6%	-3%
5	93	-6%	0%
6	93	-3%	2%
7	89	-7%	3%
8	92	-2%	5%
9	89	-1%	7%
10	89	1%	8%
11	91	4%	6%
12	90	5%	-4%
13	88	0%	-10%
14	86	0%	-12%
15	89	-6%	-2%
16	84	-6%	-10%

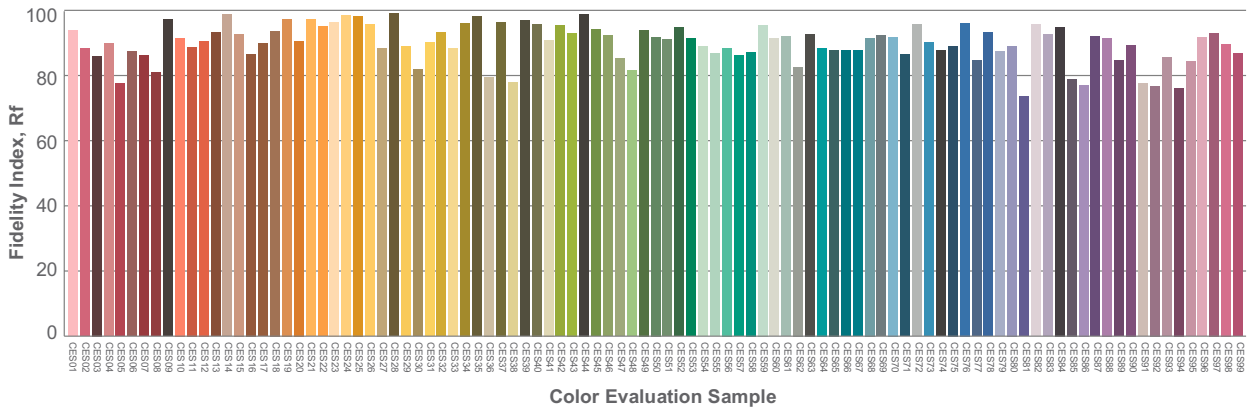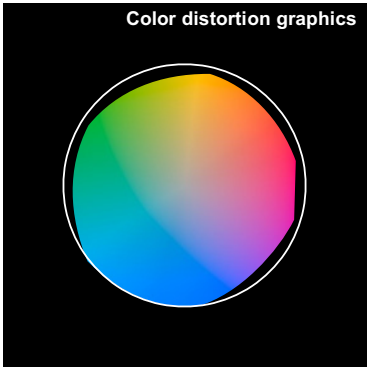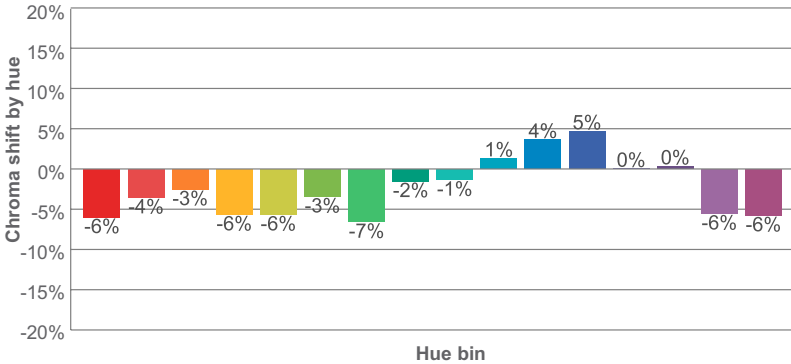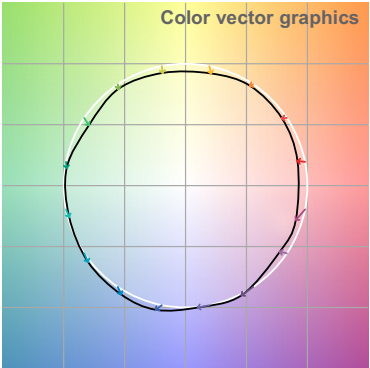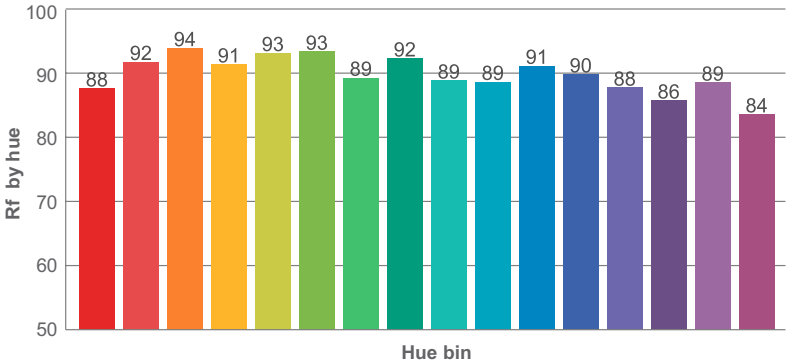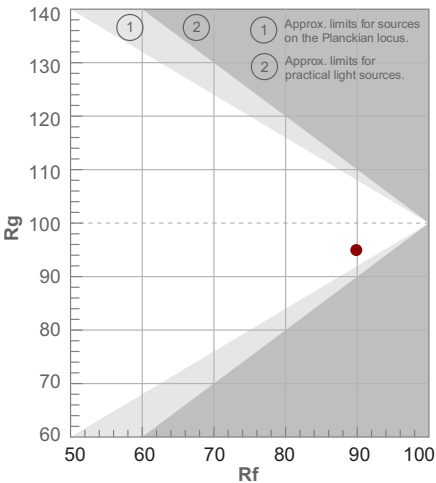

Note: Specifications are representative of the diode type and not a particular tape light article.

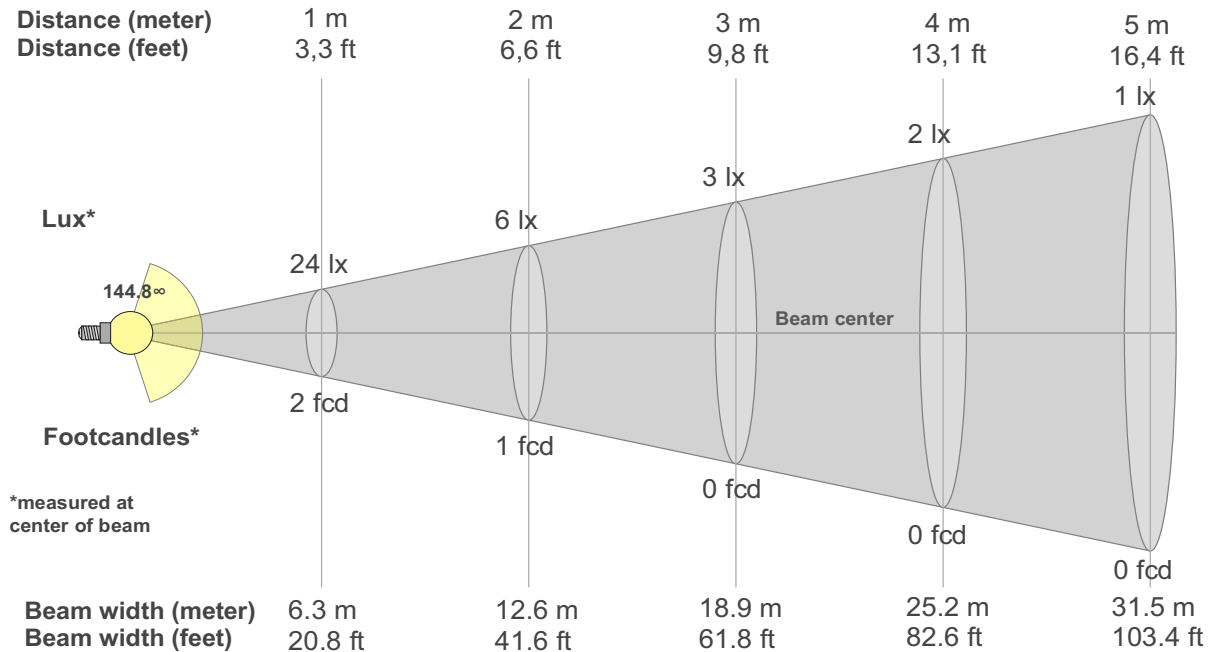

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
24lx	6lx	3lx	2lx	1lx	1lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx
2.3fcd	0.6fcd	0.3fcd	0.1fcd	0.1fcd	0.1fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd

Intensities in 0°c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
24.3	24.2	23.8	23.0	21.7	20.3	18.6	16.9	15.4	13.8	10.9	2.2	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1
100%	100%	98%	94%	89%	83%	76%	69%	63%	57%	45%	9%	1%	1%	1%	0%	1%	1%	1%	1%

Intensities in 90°c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
24.3	24.1	23.1	21.6	19.5	16.8	13.7	10.2	6.5	2.8	0.4	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2
100%	99%	95%	89%	80%	69%	56%	42%	27%	12%	2%	0%	0%	0%	0%	1%	0%	1%	1%	1%

Intensities in 180°c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
24.3	24.2	23.8	23.0	21.7	20.3	18.6	16.9	15.4	13.8	10.9	2.2	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1
100%	100%	98%	94%	89%	83%	76%	69%	63%	57%	45%	9%	1%	1%	1%	0%	1%	1%	1%	1%

Intensities in 270°c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
24.3	24.1	23.1	21.6	19.5	16.8	13.7	10.2	6.5	2.8	0.4	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2
100%	99%	95%	89%	80%	69%	56%	42%	27%	12%	2%	0%	0%	0%	0%	1%	0%	1%	1%	1%

Beam angle 50°	Field angle 10°	Cutoff angle 2,5°	Intensity ratio in 120°cone	Intensity ratio in 90°cone
144.8°	187.5°	194.7°	61.8%	40.0%