AdaptDrive VariTune Tunable White - 24V DC - 160W

AL-97-03-24160



The AdaptDrive is an all-in-one LED driver, dimmer, and CCT control that simplifies installation by fitting directly into a standard recessed electrical box—eliminating the need for a separate driver location.

This is the first driver of its kind to provide this level of power in such a compact footprint—making it ideal for high-output applications where space is limited

- Constant Voltage Output in 24VDC
- Installs directly into standard wall boxes
- Clean integrated design
- First in its class for power density in a recessed enclosure


QUICK SPECIFICATIONS

Input	120V	120V AC
Features	100% Max. Load 0% Min. Load	100% maximum load 0% minimum load
Environment	DRY LOCATION	Dry/damp environment
Certifications	RoHS c UL us LISTED	UL/cUL/Class P/Type HL/SELV/CE/ROHS/REACH
Warranty	WARRANTY 6 YEAR	6 year limited

ACCESSORIES (SOLD SEPARATELY)

Item Number	Description
AL-97-02-9901-WHTP	Glossy White Trim Plate

DIMENSIONS

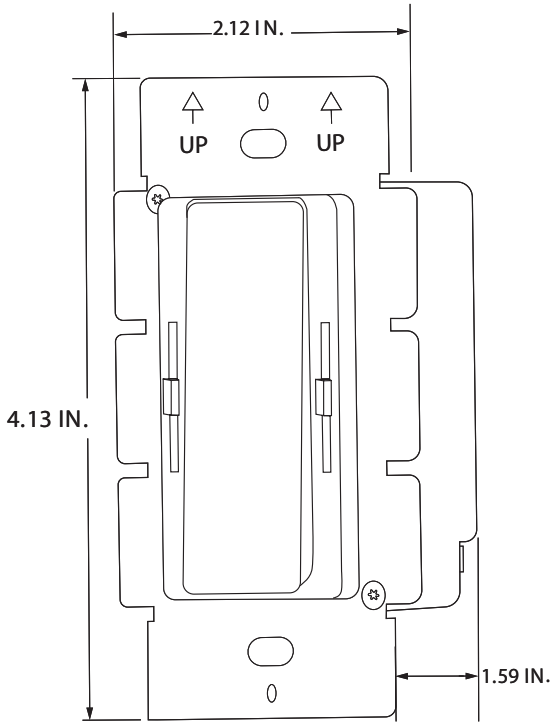


TECHNICAL INFORMATION


Item Number		AL-97-03-24160
Output	DC Voltage	24V DC
	Rated Current	6.67 A
	Rated Power	160 W
	Minimum Load	0%
Input	Voltage Range	120V AC
	Input Current	1.5 A
	Frequency Range	60 Hz
	Power Factor (Avg.)	>99%
Protection	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed
	Over Voltage	≥110% Constant current mode, recovers automatically after fault condition is removed
Environment	Working Temp.	-40~+60°C / -40°F~+140°F
	Humidity	20 - 95%RH non-condensing
Safety & EMC	Safety Standards	UL8750 CAN/CSA-C22.2 No.250.13 (US)
	EMC Emission	FCC Part15 Subpart B ANSI C63.4:2014 (US)
Other	Warranty	6 Year Limited
	Size	4.13 x 2.12 x 1.59 in.

*These drivers are derated, but when installed in a small enclosure with no heatsink or air circulation, we recommend a max. load of 40W.


DIMMING WIRING DIAGRAM

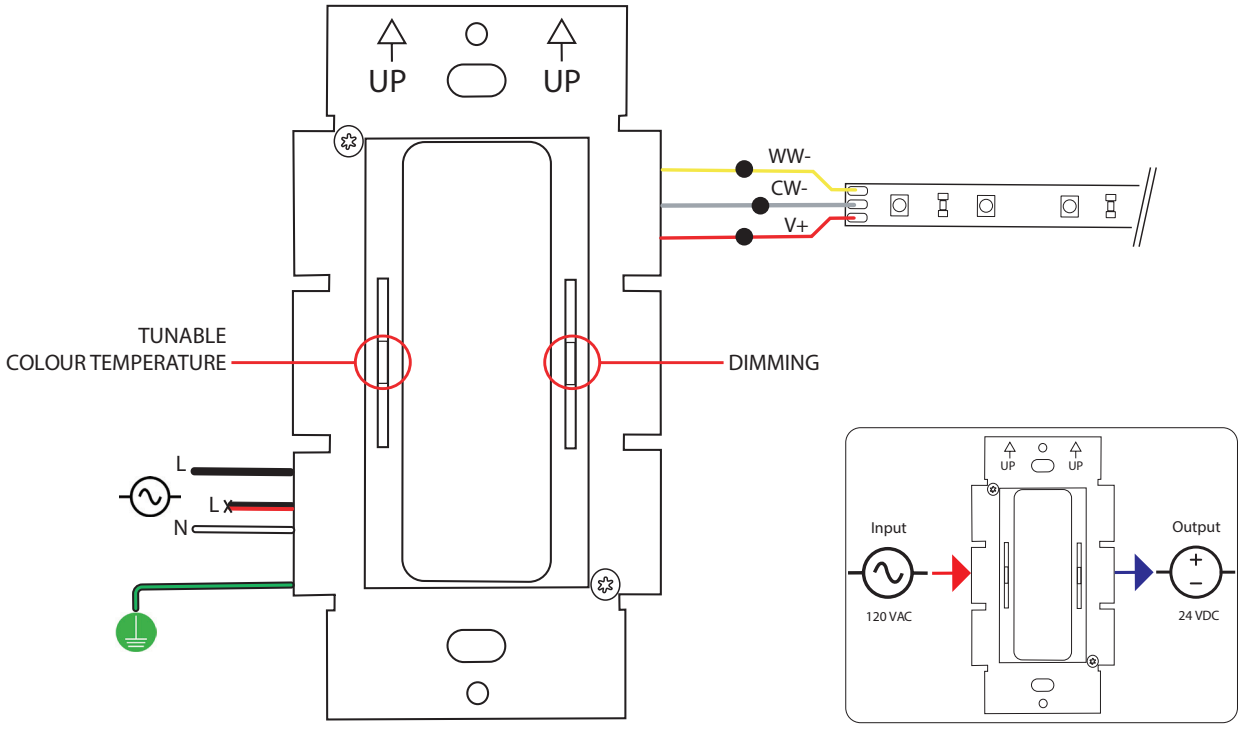

3-WAY DIMMING WIRING DIAGRAM

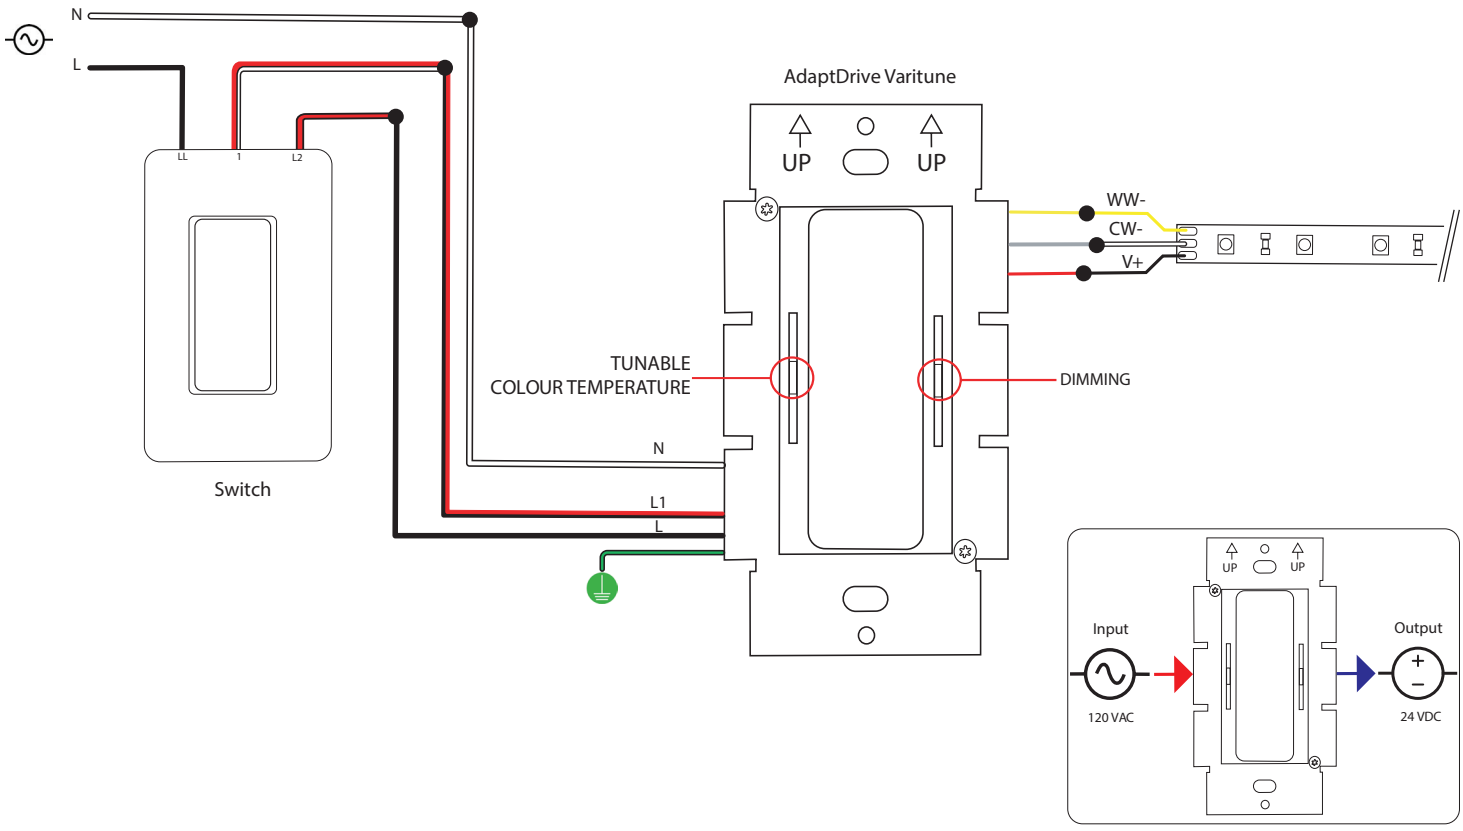

ADJUST VOLTAGE

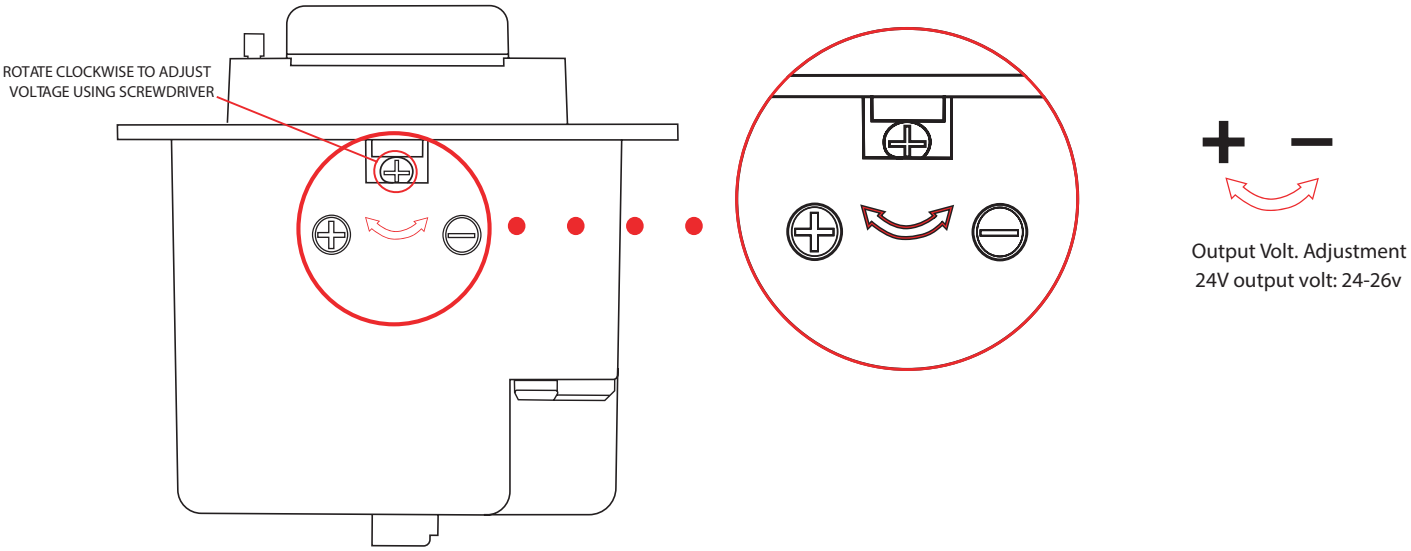

TROUBLESHOOTING

Q: Why are the lights connected to the driver blinking roughly once a second?
A: The driver may be overloaded. Check to make sure the maximum wattage is not being exceeded. There could also be a possibility of incompatible voltage. Confirm that the driver and tape light voltage match.

Q: How do I determine the compatibility?
A: Check the voltage, wattage, load capacity of both the tape light and driver.

Q: Is it possible to have multiple runs of tape light that are daisy-chained together connect to a driver with 1 lead wire?
A: Yes, but only if the total length of consecutive runs do not exceed the tape light's maximum run and also does not exceed the driver's maximum wattage.